

RUGGED/INDUSTRIAL SOLUTIONS

HIGH-SPEED AND RELIABLE
COMMUNICATION NETWORK



- Rugged & Industrial Switch
- Rugged & Industrial Media Converter

CTS

About CTS.....	4
Why CTS.....	5
Success Case.....	6

Switch Solutions

Managed Rugged Switch Solutions

- 10G Rugged Managed Switch..... 12
- 1G Rugged Managed Switch..... 13

Managed Industrial Switch

- 10G Industrial Managed Switch..... 14
- 1G Industrial Managed Switch..... 15
- 1G Industrial Managed Switch..... 16
- 1G Industrial Managed Switch..... 17

Media Converter Solutions

Rugged Media Converter

- Rugged 10G Media Converter..... 18
- Rugged 1G Media Converter..... 19

Industrial Converter Solutions

- Industrial Force 60W PoE Media Converter..... 20
- Industrial Media Converter..... 20



| Accessory

SFP/SFP+ Transceiver

- Industrial 10G Ethernet 21
- Industrial Gigabit Ethernet 21

Industrial Power Supply

- Industrial Power Supply 21

About CTS

- CTS is a leading network solution provider headquartered in Taiwan. We are professional in design and manufacture products for the Last Mile Connectivity. With branch offices in Japan, Sweden, Austria, India, we aim to develop solutions to achieve sustainability, and grow together with partners worldwide.
- Founded in 1998, public since 2015
- 142 employees internationally, 20% belong to R&D
- 350+ Customers in over 40 countries
- 97.8% Customer Satisfaction


Our Mission

Find the market gap from user scenario and application
Design reliable products that connect people at the Last Mile
Fulfill customer demands with differentiated and sustainable solutions

Sustainability

We provide reliable and sustainable solution for our customers so they can use for a long time, reducing the waste of our planet. We also adhere to the most stringent global compliance standards.


CTS acknowledges the importance of the UN Sustainable Development Goals (SDGs) and we' ve integrated into our business strategy. We' ve started to work with our suppliers and partners on the GHGs and PCF. We plan to release sustainability report to our stakeholders every year.

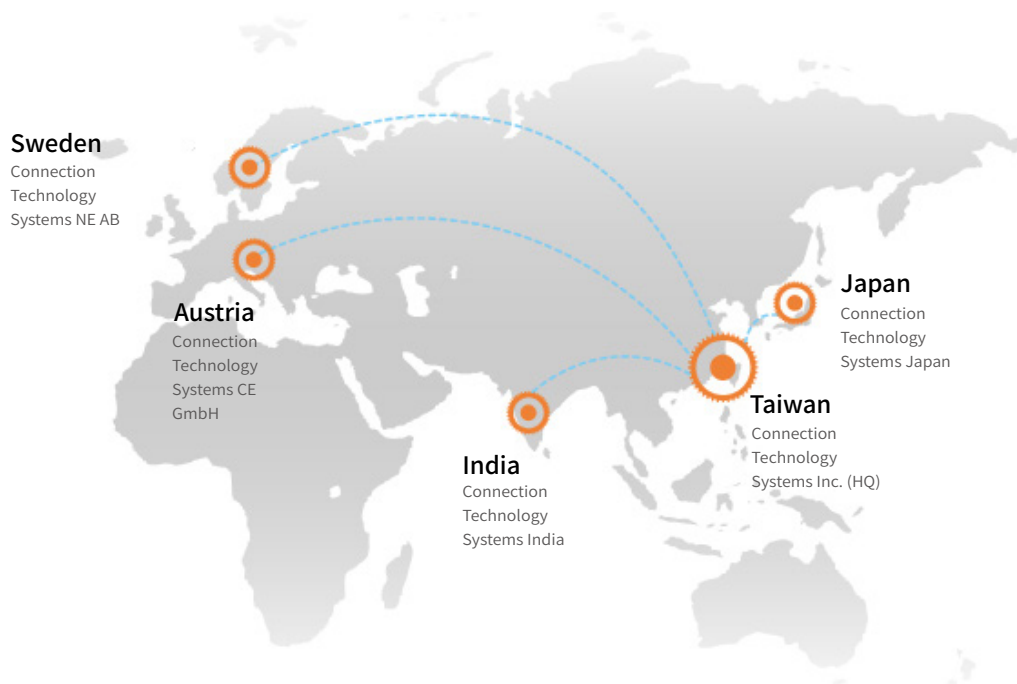

Why CTS

The Spirit of Pursuing Excellence

For CTS, our achievement is defined by each successful story our customers have experienced. Until this day, with 20 years experiences in the field, CTS' innovative spirit and passion still driving the company to pursue excellence. Through continuously interact with the clients and the markets, CTS has insisted on keeping "Differentiation and Glocalization" which has make us one of the leading solution providers for telecom companies, network operators, and broadband service providers all over the world.

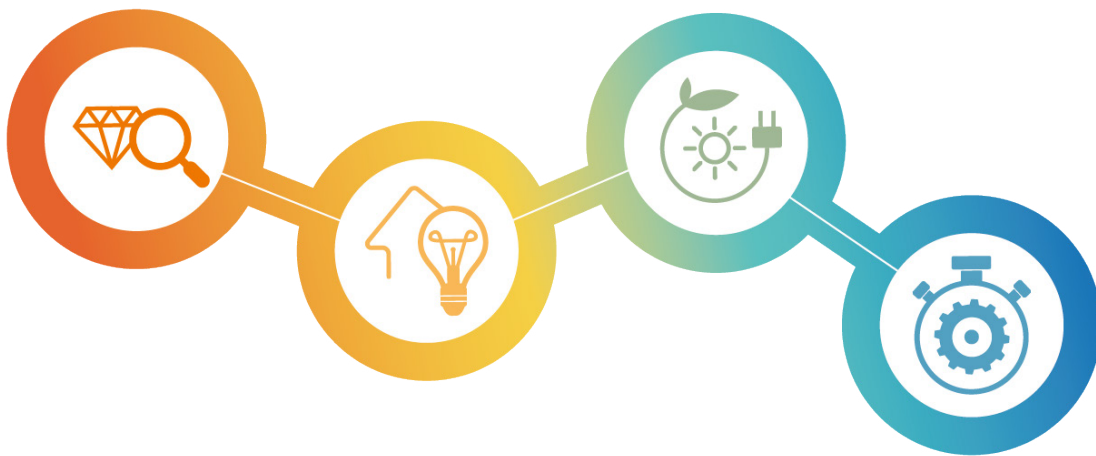

Quality Assurance

Engineering Design

- SW/HW Collaboration
- Design Verification Test
- Design for Manufacturing
- Solution & Risk Analysis

Own Production

- Made in Taiwan
- IQC/PQC/FQC/OQC
- First Pass Yield
- Dynamic Burn-in Test

Reliability Test

- High Temperature Operating
- High Temperature Storage
- Damp Heat Cycling Test
- Accelerated Aging Test
- MTBF with MIL-HDBK-217F
- ISO 9001, 14001, CE, FCC

Timely Services

- Engineering Services
- Local Branch Support
- RMA Center
- Root Cause Analysis

Largest Ski Resort in Austria Adopted CTS Industrial and Fiber Switches for Ski Lift Network

Background

Skiwelt in Ellmau, Tyrol is the largest & the most state-of-the-art ski resort in Austria, which has 284km of ski runs in Austrian Alps. In order to enhance safety and to provide better service, the resort planned to update its communication infrastructure into fiber in order to overcome longer distances. The City of Ellmau and Skiwelt also developed an application with regional information such as events, special offerings, local weather, and entertainment. Hopefully tourists can access to real-time information anytime anywhere in the resort. Skiwelt needed a reliable solution provider who can help fulfill this plan...

CTS Products




IPS-3110

- 8-Port Gigabit 802.3at PoE+
- 2-Port Gigabit Combo
- Industrial Managed Switch



IPS-3106-SE-PB

- 4-Port Gigabit 802.3at PoE+
- 2-Port Gigabit SFP
- Industrial Managed Switch



FOS-5152

- 52-Port Managed Fiber
- Managed Access Switch



Johannes Winkler,
Operations Manager, Skiwelt



We need products that work stable at 50 degrees Celsius as well as in -25 degrees Celsius and CTS has proven that their products are reliable and persistent even in harsh environment like in the Austrian Alps



Networking Consultant

CTS' regional technical support can quickly identified and resolved the issues.




Trustworthy Partner

High quality and stability over several years under extremely harsh weather conditions.



In-house Designer

Reliable and robust network helps Skiwelt to provide the best experience for their visitors.

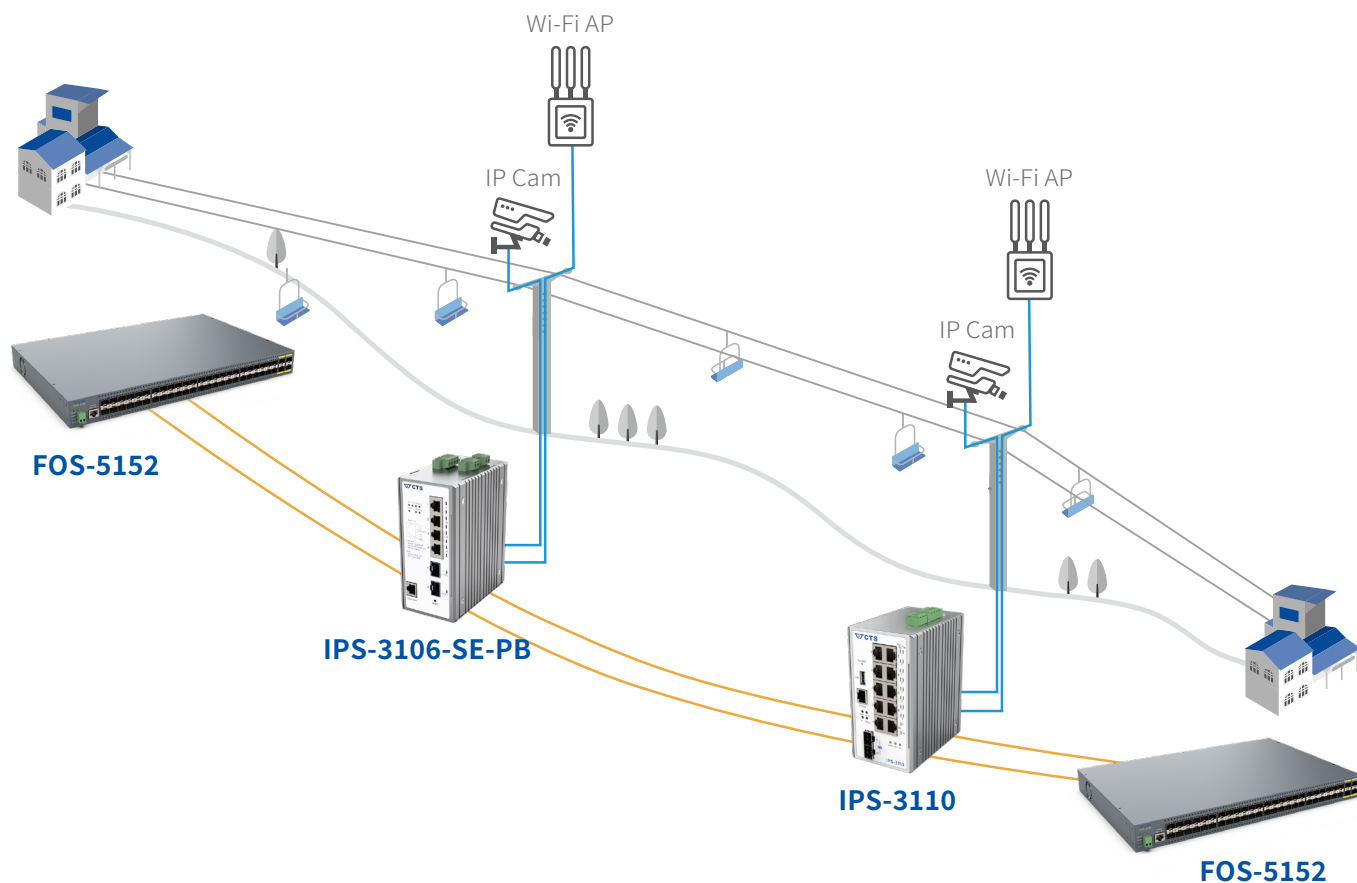

Challenge

- ① Build long distance networks along cable car systems with the longest over 3km.
- ② Lightning can easily strike when devices are being installed on the cable car mask.
- ③ Outdoor devices have to be able to endure local temperature from -10~26 degrees Celsius.
- ④ Offer public Wi-Fi along the ski-lift for visitors as well as IP cameras for slope monitoring.
- ⑤ Provide a stable connection for security and safety control.



Solution & Benefit

- ① CTS fiber connectivity solution help to overcome the challenge of long-distance transmission.
- ② CTS IPS-3110 equips with K.21 surge protection to protect devices from damage.
- ③ CTS industrial solutions is designed to endure harsh outdoor environment and it can operate under temperature from -40 to 75 degrees Celsius.
- ④ PoE features on both IPS-3106-SE-PB and IPS-3110 ease Skiwelt's effort in deploying Wi-Fi networks along the lifts and IP cameras by the slope.
- ⑤ Supports redundancy protocol to provide a 24/7 stable security network.



Providing Robust, Reliable & Flexible Solution for Harsh Environment

The CTS Rugged/Industrial Ethernet Switch series are enclosed in IP30 case which can endure wide-ranging operating temperature from -20 to 60°C/-40 to 75°C. All Switches support DIN-rail mounts which allows efficient use of cabinet space. CTS also provide redundant supply system to enable a more secure, stable and sustainable connection. The PoE Switch series support IEEE 802.3af/at/bt PoE power output that is able to supply power to PoE compliant devices which greatly reduce wiring complexity and save trouble to search for extra power outlets.

- IP30 Design Housing
- -20~60° C/-40~75° C Operating Temperature Range
- Dual Power Input for Uninterrupted Network System
- PoE Series Support IEEE 802.3at/af/bt PoE Power Output
- IEEE 802.1q Tagged VLAN and Q-in-Q
- IGMP Snooping v1, v2 and v3
- IEEE 802.1p QoS, CoS and DSCP
- IEEE 802.3ad Link Aggregation and Static Trunk
- STP, RSTP and Fast Ring v2



90W PoE
Output

SRS-3106-4BT



-40~75°C

IPS-3110



-20~60°C

SRS-3106



Robust, Reliable & Extendable Solutions to Reach Copper Devices Effortlessly



10G/Multi-G



SRC-5102SFP-MG



90W PoE Output



SRC-3002SFP-BT



-20~60°C/
-40~75°C



SRC-3002/ IAC-3012


CTS Rugged/Industrial Media Converters in a robust IP30 housing are designed to meet the demands of plug-and-play usage. These series can extend your Ethernet networks beyond 100-meter limitation and convert fiber links from multi-mode to single-mode or vice versa. These models can extend from 2 to 120km and data transmission distance is up to 120km.


Our rugged media converters feature a very useful function, PSE Auto Power Off! PSE Auto Power Off allows you to turn on/off PoE power with Link Alarm. By shutting down the fiber port in the switch, the IPC/SRC stops transmitting both data and power to connected PoE-fed products such as IP camera and Wi-Fi access point.

Since the first step when troubleshooting an IP camera or Wi-Fi access point is almost always is to reboot it, PSE Auto Power Off is a valuable feature in these situations.

- IP30 Slim Design Housing
- -20~60°C/-40~75°C Operating Temperature
- Dual DC Power Inputs for Uninterrupted Network System
- 1/2-port Copper to 1/2-port Fiber-optic Interface
- Supports 1/2-port PoE Injector
- Supports IEEE 802.3at/af/bt PoE Power Output
- Built-in DIP Switch Provides Port Isolation and Fiber Redundancy Mode
- PSE Auto Power Off to turn on and off PoE power with Link Alarm

Application of Fast Ring v2

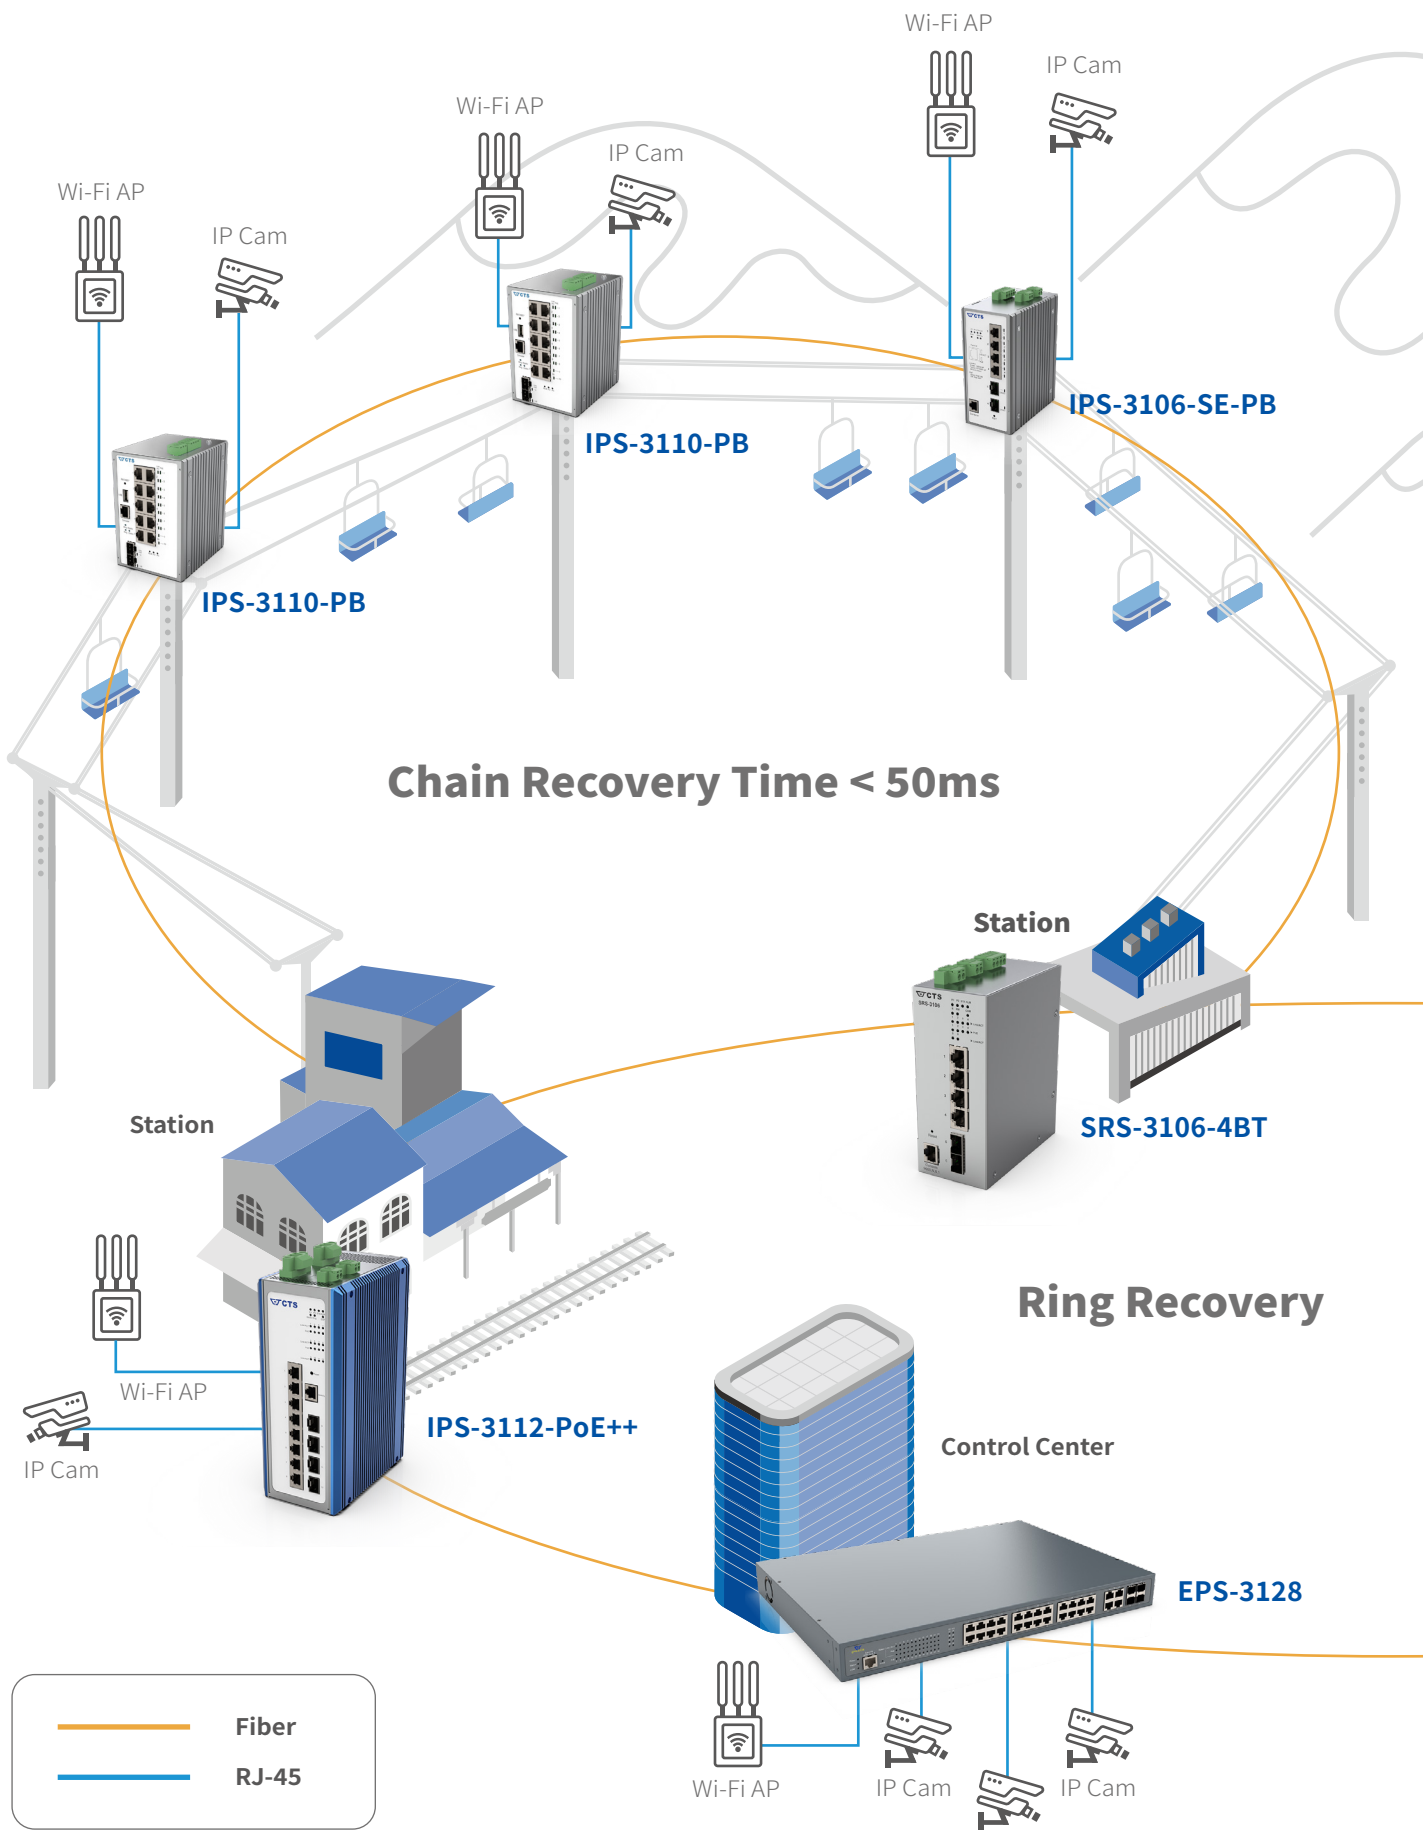

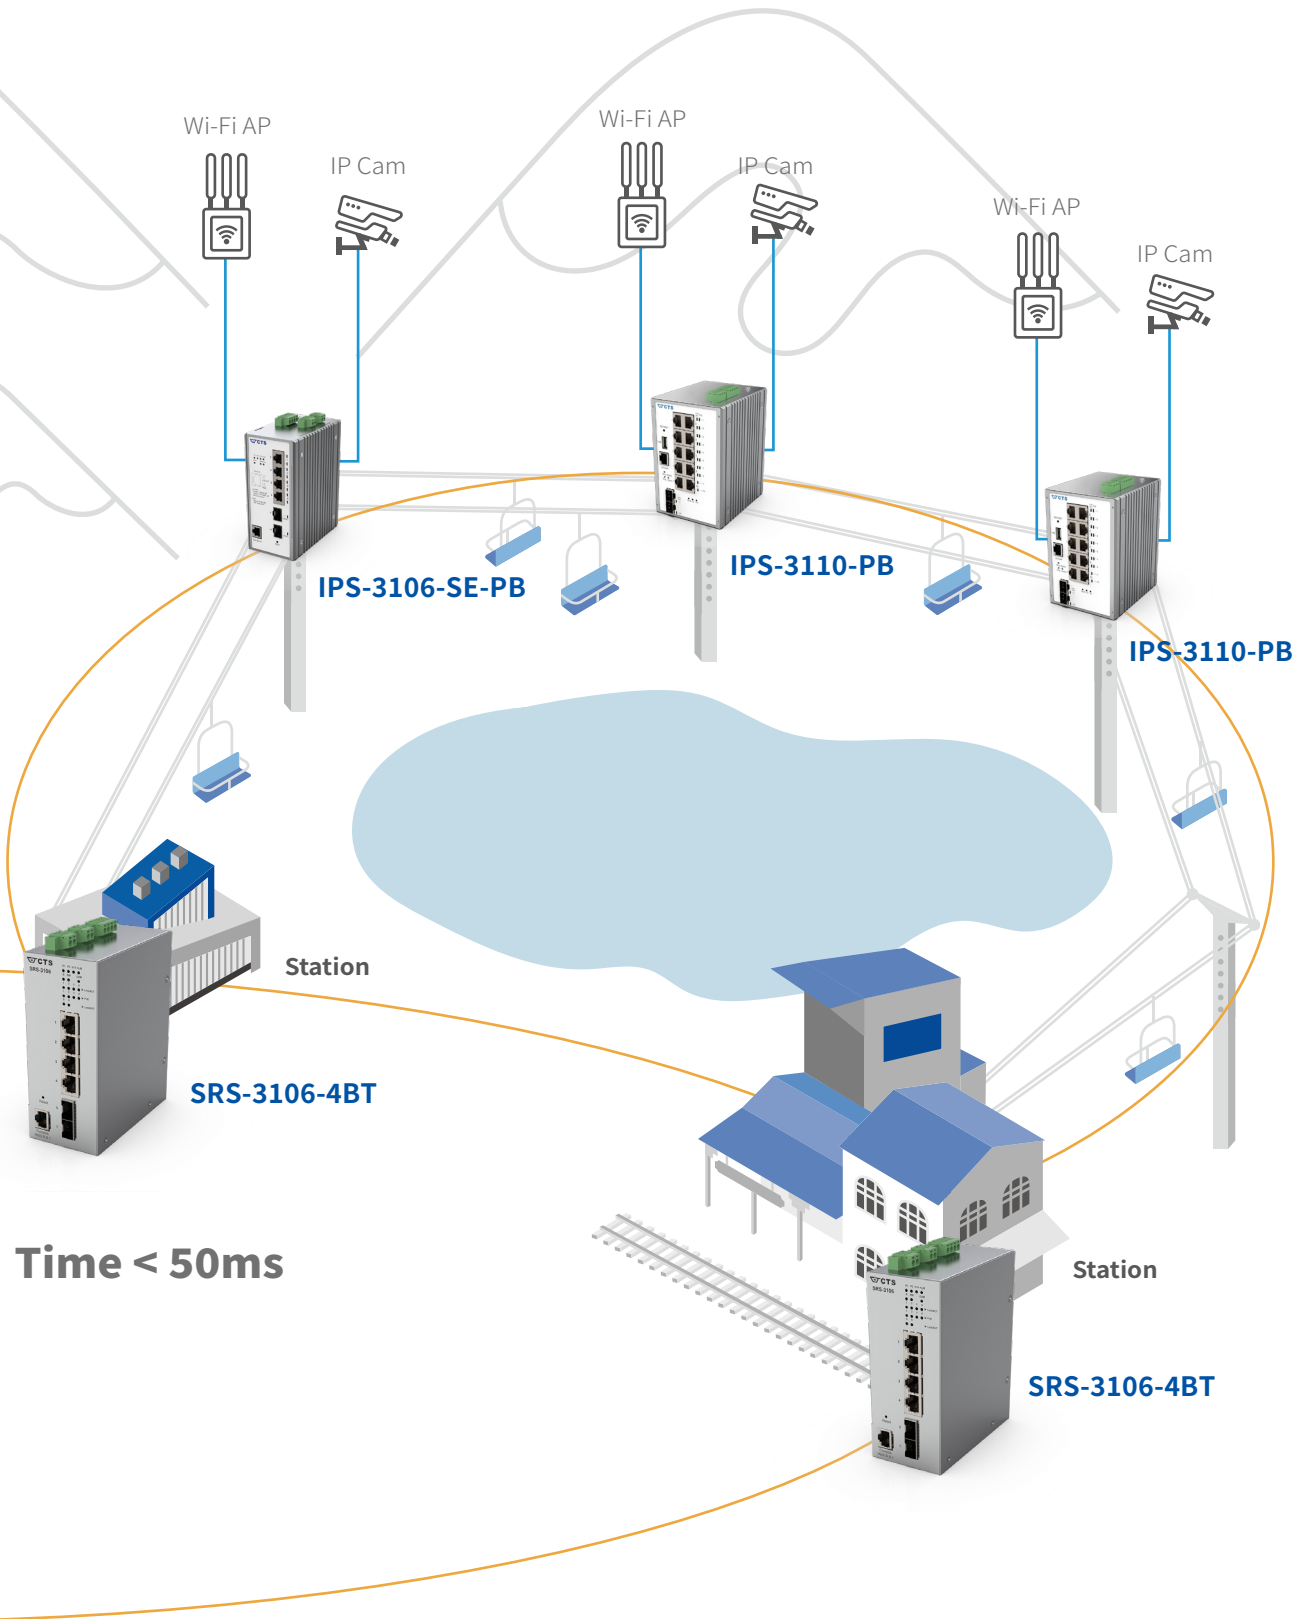

10G Rugged Managed Switch

Model Name

SRS-5110-8BT

SRS-5110

Product image



Hardware	10G SFP+	2 (1G Compatible)	2 (1G Compatible)
	10/100/1000Base-T	8	8
	1000Base-X	-	-
	RS-232 Console Port (RJ-45)	1	1
	Digital Input/Output	1 x DO	
	PoE	8 x IEEE 802.3af/at/bt	-
	PoE Budget (Max.)	300W	-
	MAC Address Table	16K	
	Non-blocking Switching Fabric	56Gbps	
	Memory Buffer	1.5 MB	
	Jumbo Frame	12 KB	
	Dimension W x D x H	65.5 x 110 x 135mm	
	Operating Temperature (Humidity)	-20~60° C (5~90%)	
	Power Source	48~57VDC Dual Input	12~57VDC Dual Input
	Power Consumption (Full Load)	311.6W	11.61W
Traffic Management	IPv6	IPv4/IPv6 Dual Stack	
	QoS	802.1p, CoS/DSCP	
	QoS Priority Queue	8	
	Bandwidth Control	●	
	Storm Control	●	
	IPTV Multicast	IGMP Snooping v1/v2/v3, MLD Snooping v1/v2	
	Network Redundancy	CTS Fast Ring v2*, STP/RSTP	
	LACP	●	
	VLAN	802.1q, Q-in-Q, Port Based, Selective QinQ, VLAN Translation	
	VLAN ID	4094	
Security & Authentication	VLAN Group	4K	
	SSH v2	●	
	DHCP Option 82	●	
Network Management & Maintenance	Authentication	RADIUS, TACACS+, 802.1x MAB	
	ACL (Access Control List)	●	
	Management	Telnet, SSH v2, WEB, SNMP v1/v2c/v3, Zabbix Monitoring Template	
	Port Mirroring	●	
	IEEE 802.3ah OAM	-	
	SNMP Power Down Trap	-	●
	DHCP	Client, Auto Provisioning, Snooping	
Certifications	SNTF	●	
	Firmware/Configuration Upgrade	FTP/TFTP/HTTP/HTTPS	
	EMC/Safety	CE/FCC Class A, RoHS	

* CTS Fast Ring v2 includes Ring and Chain Protocol

1G Rugged Managed Switch

Model Name	SRS-3106-4BT	SRS-3106
------------	--------------	----------

Product image



Hardware	10/100/1000Base-T	4	4
	1000Base-X	2	2
	RS-232 Console Port (RJ-45)	1	1
	Digital Input/Output	1 x DI + 1 x DO	
	PoE	4 x IEEE 802.3af/at/bt	-
	PoE Budget (Max.)	300W	-
	MAC Address Table	2K	
	Non-blocking Switching Fabric	12Gbps	
	Memory Buffer	128 KB	
	Jumbo Frame	9 KB	
	Dimension W x D x H	56.5 x 110 x 135mm	
	Operating Temperature (Humidity)	-20~60° C (5~90%)	
	Power Source	48~57VDC Dual Input	12~57VDC Dual Input
	Power Consumption (Full Load)	313W	7.4W
Traffic Management	IPv6	IPv4/IPv6 Dual Stack	
	QoS	802.1p, CoS/DSCP	
	QoS Priority Queue	8	
	Bandwidth Control	●	
	Storm Control	Broadcast	
	IPTV Multicast	IGMP Snooping v1/v2/v3, MLD Snooping v1/v2	
	Network Redundancy	CTS Fast Ring v2*, STP/RSTP	
	LACP	Static Port Trunking	
	VLAN	802.1q, Q-in-Q, Port Based	
	VLAN ID	4094	
VLAN Group	128		
Security & Authentication	SSH v2	●	
	DHCP Option 82	-	
	Authentication	RADIUS, TACACS+	
	ACL (Access Control List)	-	
Network Management & Maintenance	Management	Telnet, SSH v2, CLI, WEB, SNMP v1/v2c/v3, Zabbix Monitoring Template	
	Port Mirroring	●	
	IEEE 802.3ah OAM	-	
	SNMP Power Down Trap	-	●
	DHCP	Client, Auto Provisioning, Snooping	
	SNTP	●	
Firmware/Configuration Upgrade	FTP/TFTP/HTTP/HTTPS		
Certifications	EMC/Safety		CE/FCC Class A, UKCA, RCM, RoHS

* CTS Fast Ring v2 includes Ring and Chain Protocol

10G Industrial Managed Switch



Model Name	IPS-5112-8BT	IPS-5112
------------	--------------	----------



Hardware	10G SFP+	4 (1G Compatible)	4 (1G Compatible)
	10/100/1000Base-T	8	8
	1000Base-X	-	-
	RS-232 Console Port (RJ-45)	1	1
	Digital Input/Output	1 x DO	
	PoE	8 x IEEE 802.3af/at/bt	8 x IEEE 802.3af/at
	PoE Budget (Max.)	300W	240W
	MAC Address Table	16K	
	Non-blocking Switching Fabric	96Gbps	
	Memory Buffer	1.5 MB	
	Jumbo Frame	12 KB	
	Dimension W x D x H	87 x 110 x 135mm	
	Operating Temperature (Humidity)	-40~75° C (5~90%)	
	Power Source	48~57VDC Dual Input	
	Power Consumption (Full Load)	315W	255W
Traffic Management	IPv6	IPv4/IPv6 Dual Stack	
	QoS	802.1p, CoS/DSCP	
	QoS Priority Queue	8	
	Bandwidth Control	●	
	Storm Control	●	
	IPTV Multicast	IGMP Snooping v1/v2/v3, MLD Snooping v1/v2	
	Network Redundancy	CTS Fast Ring v2*, STP/RSTP	
	LACP	●	
	VLAN	802.1q, Q-in-Q, Port Based, Selective QinQ, VLAN Translation	
	VLAN ID	4094	
VLAN Group	4K		
Security & Authentication	SSH v2	●	
	DHCP Option 82	●	
	Authentication	RADIUS, TACACS+, 802.1x MAB	
	ACL (Access Control List)	●	
Network Management & Maintenance	Management	Telnet, SSH v2, WEB, SNMP v1/v2c/v3, Zabbix Monitoring Template	
	Port Mirroring	●	
	IEEE 802.3ah OAM	-	
	SNMP Power Down Trap	-	
	DHCP	Client, Auto Provisioning, Snooping	
	SNTP	●	
	Firmware/Configuration Upgrade	FTP/TFTP/HTTP/HTTPS	
Certifications	EMC/Safety	CE/FCC Class A, RoHS	
	Stability	IEC 60068-2-27 (Shock), IEC 60068-2-32 (Freefall), IEC 60068-2-6 (Vibration)	
	Surge	± 4KV	




* CTS Fast Ring v2 includes Ring and Chain Protocol

1G Industrial Managed Switch

Model Name	IPS-3112-SE-8BT	IPS-3112-SE	
Product Image			
Hardware	10/100/1000Base-T	8	8
	1000Base-X	4	4
	RS-232 Console Port (RJ-45)	1	1
	Digital Input/Output	1 x DO	
	PoE	8 x IEEE 802.3af/at/bt	8 x IEEE 802.3af/at
	PoE Budget (Max.)	300W	240W
	MAC Address Table	16K	
	Non-blocking Switching Fabric	24Gbps	
	Memory Buffer	1.5 MB	
	Jumbo Frame	12 KB	
	Dimension W x D x H	87 x 110 x 135mm	
	Operating Temperature (Humidity)	-40~75° C (5~90%)	
	Power Source	48~57VDC Dual Input	
	Power Consumption (Full Load)	313W	253W
	Traffic Management	IPv6	IPv4/IPv6 Dual Stack
QoS		802.1p, CoS/DSCP	
QoS Priority Queue		8	
Bandwidth Control		●	
Storm Control		●	
IPTV Multicast		IGMP Snooping v1/v2/v3, MLD Snooping v1/v2	
Network Redundancy		CTS Fast Ring v2*, STP/RSTP	
LACP		●	
VLAN		802.1q, Q-in-Q, Port Based, Selective QinQ, VLAN Translation	
VLAN ID		4094	
VLAN Group	4K		
Security & Authentication	SSH v2	●	
	DHCP Option 82	●	
	Authentication	RADIUS, TACACS+, 802.1x MAB	
Network Management & Maintenance	ACL (Access Control List)	●	
	Management	Telnet, SSH v2, WEB, SNMP v1/v2c/v3, Zabbix Monitoring Template	
	Port Mirroring	●	
	IEEE 802.3ah OAM	-	
	SNMP Power Down Trap	-	
	DHCP	Client, Auto Provisioning, Snooping	
Certifications	SNTP	●	
	Firmware/Configuration Upgrade	FTP/TFTP/HTTP/HTTPS	
	EMC/Safety	CE/FCC Class A, RoHS	
	Stability	IEC 60068-2-27 (Shock), IEC 60068-2-32 (Freefall), IEC 60068-2-6 (Vibration)	
	Surge	± 4KV	



* CTS Fast Ring v2 includes Ring and Chain Protocol

1G Industrial Managed Switch

Model Name	IPS-3110	IPS-3110-PB	IES-3110	
Product Image				
Hardware	10/100/1000Base-T	10	10	10
	1000Base-X	2 (COMBO)	2 (COMBO)	2 (COMBO)
	RS-232 Console Port (RJ-45)	1	1	1
	USB Port	1 x USB 2.0 (Type A)		
	Digital Input/Output	1 x DO		
	PoE	8 x IEEE 802.3af/at		-
	PoE Budget (Max.)	240W		-
	MAC Address Table	16K		
	Non-blocking Switching Fabric	20Gbps		
	Memory Buffer	256 KB		
	Jumbo Frame	9 KB		
	Dimension W x D x H	73 x 110 x 135mm	88 x 110 x 135mm	73 x 110 x 135mm
	Operating Temperature (Humidity)	-40~75° C (5~90%)		
	Power Source	48~54VDC Dual Input	24~54VDC Dual Input	12~54VDC Dual Input
	Power Consumption (Full Load)	255W		15W
Traffic Management	IPv6	-		
	QoS	802.1p, CoS/DSCP		
	QoS Priority Queue	8		
	Bandwidth Control	●		
	Storm Control	Broadcast		
	IPTV Multicast	IGMP Snooping v1/v2		
	Network Redundancy	CTS Fast Ring v2*, STP/RSTP		
	LACP	●		
	VLAN	802.1q, Port Based		
	VLAN ID	4094		
VLAN Group	128			
Security & Authentication	SSH v2	●		
	DHCP Option 82	-		
	Authentication	RADIUS, 802.1x MAB		
	ACL (Access Control List)	-		
Network Management & Maintenance	Management	Telnet, SSH v2, CLI, WEB, SNMP v1/v2c/v3, Zabbix Monitoring Template		
	Port Mirroring	●		
	IEEE 802.3ah OAM	-		
	SNMP Power Down Trap	-	●	
	DHCP	Client, Auto Provisioning, Snooping		
	SNTP	●		
Certifications	Firmware/Configuration Upgrade	FTP/TFTP/HTTP/HTTPS/USB 2.0		
	EMC/Safety	CE/FCC Class A, UKCA, RoHS		
	Stability	IEC 60068-2-27 (Shock), IEC 60068-2-32 (Freefall), IEC 60068-2-6 (Vibration)		
	Surge	± 6KV		

* CTS Fast Ring v2 includes Ring and Chain Protocol

1G Industrial Managed Switch

Model Name	IPS-3106-SE-PB	IPS-3106-SE	
Product Image			
Hardware	10/100/1000Base-T	4	4
	1000Base-X	2	2
	RS-232 Console Port (RJ-45)	1	1
	Digital Input/Output	1 x DI + 1 x DO	
	PoE	4 x IEEE 802.3af/at	
	PoE Budget (Max.)	120W	
	MAC Address Table	8K	
	Non-blocking Switching Fabric	12Gbps	
	Memory Buffer	524.8 KB	
	Jumbo Frame	9 KB	
	Dimension W x D x H	63 x 110 x 135mm	57 x 110 x 135mm
	Operating Temperature (Humidity)	-40~75° C (5~90%)	
	Power Source	24~54VDC Dual Input	48~54VDC Dual Input
	Power Consumption (Full Load)	135W	
Traffic Management	IPv6	IPv4/IPv6 Dual Stack	
	QoS	802.1p, CoS/DSCP	
	QoS Priority Queue	8	
	Bandwidth Control	●	
	Storm Control	●	
	IPTV Multicast	IGMP Snooping v1/v2/v3, MLD Snooping v1/v2	
	Network Redundancy	CTS Fast Ring v2*, STP/RSTP	
	LACP	●	
	VLAN	802.1q, Q-in-Q, Port Based	
	VLAN ID	4094	
Security & Authentication	VLAN Group	2K	
	SSH v2	●	
	DHCP Option 82	●	
	Authentication	RADIUS, TACACS+, 802.1x MAB	
Network Management & Maintenance	ACL (Access Control List)	●	
	Management	Telnet, SSH v2, CLI, WEB, SNMP v1/v2c/v3, Zabbix Monitoring Template	
	Port Mirroring	●	
	IEEE 802.3ah OAM	-	
	SNMP Power Down Trap	-	
	DHCP	Client, Auto Provisioning, Snooping	
Certifications	SNTP	●	
	Firmware/Configuration Upgrade	FTP/TFTP/HTTP/HTTPS	
	EMC/Safety	CE/FCC Class A, UKCA, RCM, RoHS	
	Stability	IEC 60068-2-27 (Shock), IEC 60068-2-32 (Freefall), IEC 60068-2-6 (Vibration)	
	Surge	± 6KV	

* CTS Fast Ring v2 includes Ring and Chain Protocol

Rugged 10G Media Converter

Model name	SRC-5102SFP-MG	SRC-5002SFP-MG-BT	SRC-5002SFP-MG
	Managed	Non-managed	Non-managed

Product Image




Hardware	10G SFP+	1	1	1
	1G/2.5G/5G/10GBase-T	1	1	1
	1000Base-X	Compatible	Compatible	Compatible
	Digital Input/Output	1 x DI	1 x DO	1 x DO
	PoE	-	1 x IEEE 802.3af/at/bt	-
	Store and Forward		●	
	Auto-MDI/MDI-X		●	
	Auto-negotiation in TP Port		●	
	Flow Control		●	
	MAC Address Table		4K	
	Memory Buffer		1 MB	
	Jumbo Frame		16 KB	
	Slide-in Chassis		-	
	Dimension W x D x H		71 x 94 x 26mm	
	Operating Temperature (Humidity)		-20~60° C (5~90%)	
	Power Source	12~57VDC	48~57VDC	12~57VDC
	Power Connector	Terminal Block or DC Jack	Terminal Block	Terminal Block or DC Jack
Power Consumption (Full Load)	11W	68W	7W	
Management & Features	PSE Auto Power Off	-	●	-
	IEEE 802.3ah OAM		-	
	Loopback Mode		-	
	QoS	802.1p, CoS/DSCP		-
	QoS Priority Queue	8		-
	Bandwidth Control	●		-
	VLAN	802.1q, Q-in-Q, Port based		-
	VLAN ID	4094		-
	VLAN Groups	128		-
	Management	Telnet, SSHv2, CLI, WEB, SNMP v1/v2c/v3		-
	SNMP Power Down Trap		-	
	DHCP	Client, Auto Provisioning, Snooping		-
	Link Fault	-		Link Alarm
Firmware Upgrade	FTP/TFTP/HTTP/HTTPS		-	
Certifications	EMC/Safety	CE/FCC Class A, UKCA, RCM, VCCI, RoHS		

Rugged 1G Media Converter

Model name	SRC-3002SFP-BT-DO	SRC-3002SFP-BT	SRC-3002SFP-DO	SRC-3002SFP
	Non-managed	Non-managed	Non-managed	Non-managed

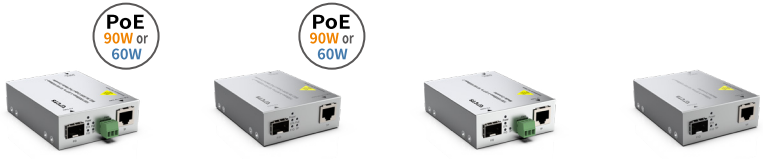

Product Image





Hardware	10/100/1000Base-T	1	1	1	1
	1000Base-X	1	1	1	1
	Digital Output	●	-	●	-
	PoE	1 x IEEE 802.3af/at/bt			-
	Store and Forward			●	
	Auto-MDI/MDI-X			●	
	Auto-negotiation in TP Port			●	
	Flow Control			-	
	MAC Address Table			2K	
	Memory Buffer			128 KB	
	Jumbo Frame			9 KB	
	Slide-in Chassis			-	
	Dimension W x D x H	71 x 94 x 26mm			
	Operating Temperature (Humidity)	-20~60° C (5~95%)		-40~75° C (5~95%)	
	Power Source	48~57VDC		12~57VDC	
	Power Connector	Terminal Block or DC Jack			
	Power Consumption (Full Load)	93W / 62.7W*		2.45W	
Management & Features	PSE Auto Power Off	●			-
	Data-diode Direction	-	●	-	●
	Link Alarm			●	
Certifications	EMC/Safety CE/FCC Class A, UKCA, RCM, RoHS				

*Only for DC Jack module

Industrial Force 60W PoE Media Converter

Model Name	IPC-3014-PoE++		IPC-3012-PoE++	
	Non-managed		Non-managed	
Product Image				
Hardware	10/100/1000Base-T	2		1
	1000Base-X	2		1
	Digital Output		●	
	PoE	1 x up to Force 60W PoE + 1 x IEEE 802.3af/at		1 x up to Force 60W PoE or 1 x IEEE 802.3af/at
	PoE Budget (Max.)	90W		60W
	Store and Forward		●	
	Auto-MDI/MDI-X		●	
	Auto-negotiation in Fiber Port		●	
	MAC Address Table		2K	
	Memory Buffer		128 KB	
	Jumbo Frame		9 KB	
	Dimension W x D x H		36 x 110 x 135mm	
	Operating Temperature (Humidity)		-40~75° C (5~90%)	
	Power Source		12~57VDC Dual Input	
Power Consumption (Full Load)	96W		64.8W	
Management & Features	PSE Auto Power Off		●	
	Link Alarm		●	
	Network Redundancy	Fiber Backup Mode		-
Certifications	EMC/Safety	CE/FCC Class A, UKCA, RoHS		
	Stability	IEC 60068-2-27 (Shock), IEC 60068-2-32 (Freefall), IEC 60068-2-6 (Vibration)		
	Surge	± 6KV		

Industrial Media Converter

Model Name	IAC-3014		IAC-3012	
	Non-managed		Non-managed	
Product Image				
Hardware	10/100/1000Base-T	2		1
	1000Base-X	2		1
	Digital Output		●	
	PoE	-		-
	PoE Budget (Max.)	-		-
	Store and Forward		●	
	Auto-MDI/MDI-X		●	
	Auto-negotiation in Fiber Port		●	
	MAC Address Table		2K	
	Memory Buffer		128 KB	
	Jumbo Frame		9 KB	
	Dimension W x D x H		36 x 110 x 135mm	
	Operating Temperature (Humidity)		-40~75° C (5~90%)	
	Power Source		12~48VDC Dual Input	
Power Consumption (Full Load)	4.8W		3.4W	
Management & Features	PSE Auto Power Off		-	
	Link Alarm		●	
	Network Redundancy	Fiber Backup Mode		-
Certifications	EMC/Safety	CE/FCC Class A, UKCA, RoHS		
	Stability	IEC 60068-2-27 (Shock), IEC 60068-2-32 (Freefall), IEC 60068-2-6 (Vibration)		
	Surge	± 6KV		

Industrial 10G Ethernet SFP+ Transceiver

Product Image



MODEL	SFP-51-D					
	Speed (Gbps)	Type	Connector	Distance	Wavelength (nm)	Temperature
SFP-51FC(SM-02)-D	10	SM	LC	2KM	1310	-40~85° C

Industrial Gigabit Ethernet SFP Transceiver

Product Image



MODEL	SFP-31-D					
	Speed (Mbps)	Type	Connector	Distance	Wavelength (nm)	Temperature
SFP-31FC-D	1000	MM	LC	550M	850	-40~85° C
SFP-31FC(MM-02)-D	1000	MM	LC	2KM	1310	-40~85° C
SFP-31FC(SM-10/20)-D	1000	SM	LC	10/20KM	1310/1310	-40~85° C
SFP-31W2A(SM-10/20)-D	1000	WDM	LC	10/20KM	TX:1310/1310 RX:1550/1550	-40~85° C
SFP-31W2B(SM-10/20)-D	1000	WDM	LC	10/20KM	TX:1550/1550 RX:1310/1310	-40~85° C

Industrial Power Supply

Product Image



MODEL	Output			Input	Protection	Temperature	Dimension W x D x H
	Rated Power	Voltage Adj. Range*	Current Range	Voltage Range			
SDR-480-48	480W	48-55V	0~10A	90~264VAC 127~370VDC	Overload, Over Voltage, Over Temperature	-25~70° C	85.5 x 128.5 x 125.2mm
SDR-240-48	240W		0~5A	88~264VAC 124~370VDC			63 x 113.5 x 125.2mm
SDR-120-48	120W		0~2.5A				40 x 113.5 x 125.2mm
SDR-75-48	76.8W		0~1.6A				32 x 102 x 125.2mm
NDR-480-48	480W	48-55V	0~10A	90~264VAC 127~370VDC	Overload, Over Voltage, Over Temperature	-20~70° C	85.5 x 128.5 x 125.2mm
NDR-240-48	240W		0~5A				63 x 113.5 x 125.2mm
NDR-120-48	120W		0~2.5A				40 x 113.5 x 125.2mm
NDR-75-48	76.8W		0~1.6A				32 x 102 x 125.2mm
MDR-60-48	60W	48-56V	0~1.25A	85~264VAC	Overload, Over Voltage	-20~70° C	40 x 100 x 90mm
MDR-20-12	20W	10.8~13.2V	0~1.67A	120~370VDC			-20~70° C

* Output Voltage Tolerance: ± 1.0%

Connection Technology Systems Inc. (HQ)

18F-6, No.79, Sec.1, Xintai 5th Rd., Xizhi Dist., New Taipei
City 221, Taiwan, R.O.C.

Tel : +886 2 26989661

Sales Direct Line : +886 2 26989201

General Information : info@ctsystem.com

Connection Technology Systems NE AB

E A Rosengrens gata 31, 421 31 Västra Frölunda, Sweden

Tel : +46 31 22 19 80

Email : info@ctsystem.se

Connection Technology Systems CE GmbH

Wienerbergstraße 11 / Tower B / 6th Floor / Office 2

1100 Vienna, Austria

Tel : +43 1 343 9553 50

Email : cts_ce@ctsystem.com

Connection Technology Systems Japan Ltd.

Higobashi Bldg, No3 R503, 1-23-13, Edobori, Nisi-ku,
Osaka

550-0002, Japan

Tel : +81 6 6450 8890

fax : +81 6 6450 8898

Email : cts_japan@ctsystem.com

**Connection Technology Systems India Private
Limited**

No.1,1st Floor,RK Residency Vajarahalli,
Uttarahalli,Talgatpura, Kanakpura MN Rd, Bangalore,
Karnataka, India, 560062

Tel : +91 97403 08261

Email : cts_in@ctsystem.com

