



CPC-CHASSIS-08-II

8-slot PoE Media Converter Chassis

User's Guide

Version: 1.1

Trademarks

CTS is a registered trademark of Connection Technology Systems Inc.
All trademarks belong to their respective proprietors.

Contents subject to change without prior notice.

Copyright Statement

Copyright © 2025 Connection Technology Systems Inc.

This publication may not be reproduced as a whole or in part, in any way whatsoever unless prior consent has been obtained from Connection Technology Systems Inc.

FCC Warning

This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limitations are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult your local distributors or an experienced radio/TV technician for help.
- Shielded interface cables must be used in order to comply with emission limits.

Changes or modifications to the equipment, which are not approved by the party responsible for compliance, could affect the user's authority to operate the equipment.

CE Mark Warning

This is a Class A product. In a domestic environment, this product may cause radio interference in which case the user may be required to take adequate measures.

Revision History

Version	Date	Description
1.0	2025/8/11	First release.
1.1	2025/12/29	Revised: Section 3.1.2 LED of CPC-3002SFP-II-BT

CTS Contact Information

■ Headquarter/Manufacturer

Connection Technology Systems Inc.

18F-6, No.79, Sec.1, Xintai 5th Rd.,
XiZhi Dist., New Taipei City 221, Taiwan(R.O.C)
Tel: +886-2-2698-9661
Fax: +886-2-2698-3960
Dir.Line:+886-2-2698-9201
www.ctsystem.com

■ Global Authorized Representatives

Connection Technology Systems NE AB

E A Rosengrens gata 31,
421 31 Västra Frölunda, Sweden
Tel: +46-31-221980

E-mail: info@ctsystem.se

Connection Technology Systems Japan

Higobashi Bldg, No3 R503, 1-23-13, Edobori, Nisi-ku,
Osaka 550-0002, Japan
Tel: +81-6-6450-8890

E-mail: cts_japan@ctsystem.com

Connection Technology Systems CE GmbH

Wienerbergstraße 11 / Tower B / 6th Floor / Office 2
1100 Vienna
AUSTRIA
Tel: +43 1 343 9553 50

E-mail: cts_ce@ctsystem.com

Connection Technology Systems India Private Limited

No.1,1st Floor,RK Residency Vajarahalli,
Uttarahalli,Talgatpura, Kanakpura MN Rd, Bangalore,
Karnataka, India, 560062

E-mail: cts_in@ctsystem.com

Table of Contents

REVISION HISTORY	III
CTS CONTACT INFORMATION	IV
TABLE OF CONTENTS	V
1 INTRODUCTION	6
1.1 THE CPC-CHASSIS-08-II.....	6
1.1.1 Front Panel of CPC-CHASSIS-08-II	8
1.1.2 Technical Specification	9
1.2 THE CPC-PWR-AC-II	10
1.2.1 Front Panel.....	10
1.2.2 Technical Specification	11
1.3 THE CPC-3002SFP-II-BT	12
1.3.1 Front Panel.....	12
1.3.2 DIP Switch Setting	13
1.3.3 Technical Specification	14
2 INSTALLATION	15
2.1 INSTALLATION REQUIREMENTS	16
2.2 CHECKING THE PACKAGE CONTENTS	16
2.3 INSTALLING CPC-3002SFP-II-BT	17
2.4 INSTALLING THE CPC-CHASSIS-08-II.....	18
2.4.1 Standard 19-inch Rack Installation	18
2.4.2 Desk Top Installation	18
2.5 INSTALLING AND REMOVING SFP MODULES.....	19
2.5.1 Installing SFP Modules in CPC-3002SFP-II-BT	19
2.5.2 Removing SFP Modules from CPC-3002SFP-II-BT	19
2.6 CONNECTING THE CPC-3002SFP-II-BT MEDIA CONVERTER MODULE TO NETWORK.....	19
2.7 INSTALLING THE CPC-PWR-AC-II POWER MODULE.....	20
2.8 POWER ON THE CPC-CHASSIS-08-II	21
3 OPERATION	22
3.1 LED STATUS	22
3.1.1 LED of CPC-PWR-AC-II	22
3.1.2 LED of CPC-3002SFP-II-BT	23
4 MAINTENANCE	24
4.1 FAULT IDENTIFICATION.....	24
4.1.1 Local Check.....	24
4.2 HARDWARE REPLACEMENT PROCEDURES.....	25

Introduction


The CTS CPC-CHASSIS-08-II is an 8-slot PoE Media Converter Chassis designed to work with the CPC-3002SFP-II-BT media converter module and CPC-PWR-AC-II power module.

This guide provides essential information about the chassis, media converter, and power module, including installation, operation, and maintenance details.

1.1 The CPC-CHASSIS-08-II

Connection Technology Systems (CTS) CPC-CHASSIS-08-II provides 8 dedicated slots for CPC-3002SFP-II-BT media converter modules, plus 2 additional slots for CPC-PWR-AC-II power modules for redundant power operation. The CPC-CHASSIS-08-II features a front-access design for easy maintenance, including power modules, LED indicators, and media converter slots. The fanless design enhances reliability while reducing maintenance needs.

The chassis can be used as a tabletop unit or mounted in a standard 19-inch rack using the 19-Inch brackets, included in the package.

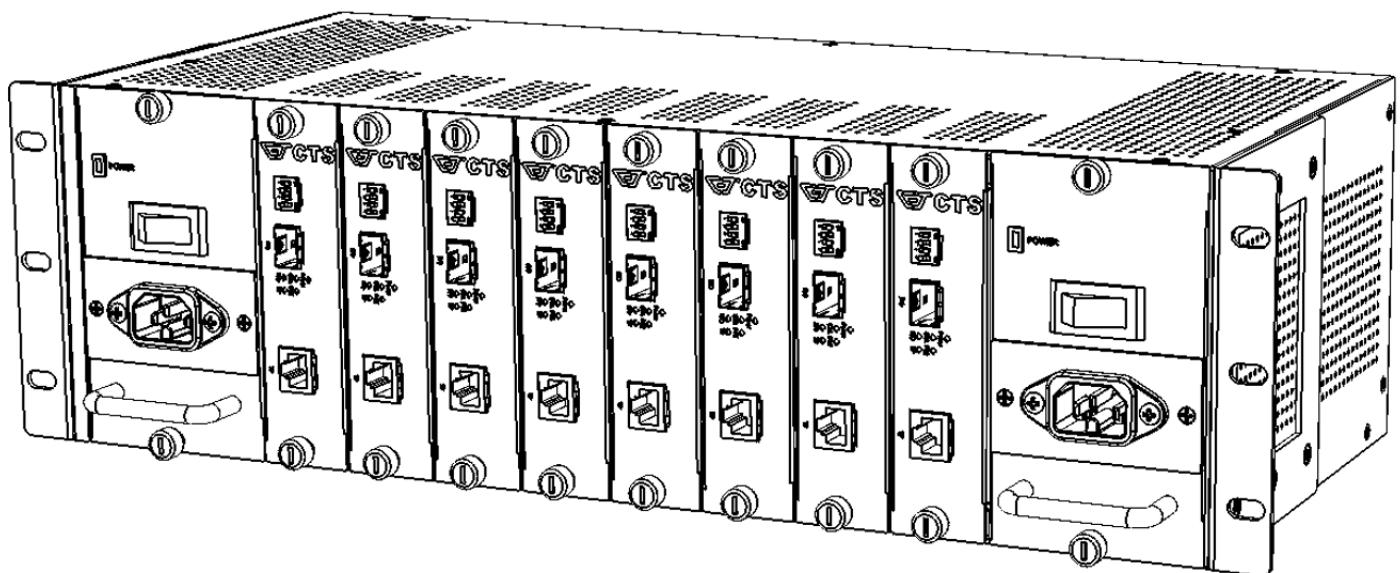

Key Features

- 8 hot-swappable slots for **CPC-3002SFP-II-BT** media converter modules
- 2 hot-swappable power slots for **CPC-PWR-AC-II** power modules
- Power redundancy for uninterrupted operation
- Operating temperature range: 0~70°C
- Fan less design for quiet operation
- Compact design for space-saving installation

1.1.1 Front Panel of CPC-CHASSIS-08-II

The slots for power and media converter modules are located at the front of CPC-CHASSIS-08-II.

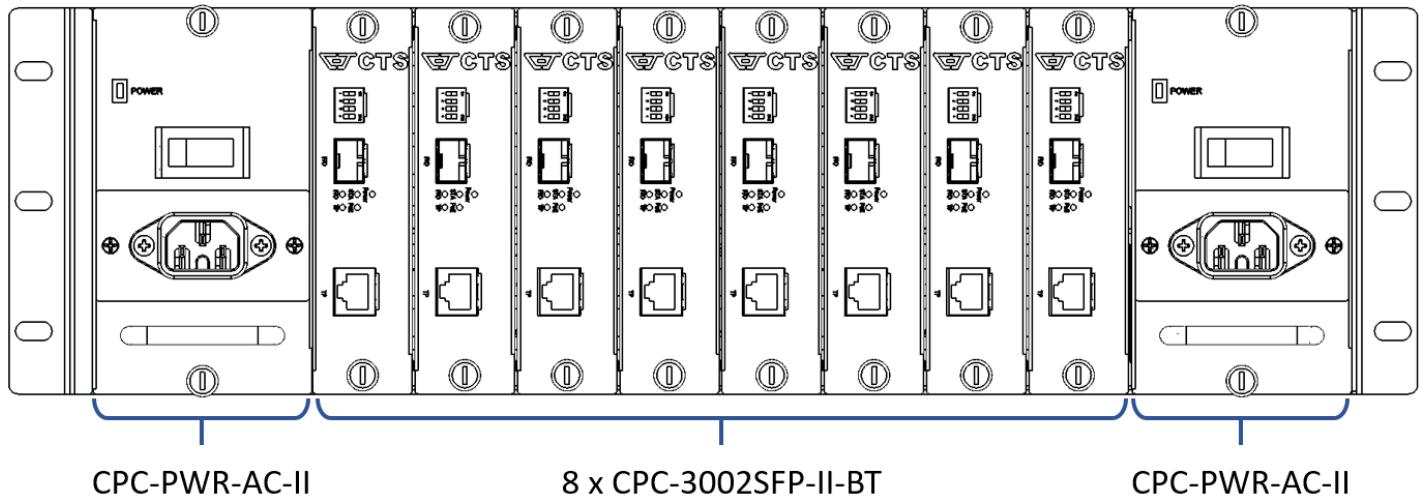


Figure 1. CPC-CHASSIS-08-II with 2 x CPC-PWR-AC-II and 8 x CPC-3002SFP-II-BT installed

CPC-PWR-AC-II: Power module for the CPC-CHASSIS-08-II. The chassis supports up to two power modules for redundancy. Refer to [Section 1.2](#) for details.

CPC-3002SFP-II-BT: Media converter module for the CPC-CHASSIS-08-II. The chassis supports up to eight media converter modules. Refer to [Section 1.3](#) for details.

1.1.2 Technical Specification

Slots	8 x media converter module (CPC-3002SFP-II-BT), 2 x power module (CPC-PWR-AC-II)
Operation Temperature	0°C ~70°C
Storage Temperature	-20°C ~85°C
Humidity	5% ~ 90% RH, non-condensing
Power Input	220~240VAC, 50/60Hz (via CPC-PWR-AC-II)
Power Consumption	Full-load < 340W (1160 BTU/h), including PoE load
Total PoE budget	300W
Dimension	440 x 200 x 132 mm (W x D x H)
Weight	4.25 Kg (without power and converter module)
Certifications	CE/FCC Class A, CB(TUV), UKCA, RCM, RoHS 2.0

1.2 The CPC-PWR-AC-II

The CPC-PWR-AC-II is the dedicated power module for the CPC-CHASSIS-08-II. The chassis supports up to two power modules, enabling a redundant power system that ensures uninterrupted operation even if one module fails. Each module connects to a standard 220~240V AC power source (50/60Hz, 1.5A) and supports hot-swapping for maintenance without affecting system performance.

1.2.1 Front Panel

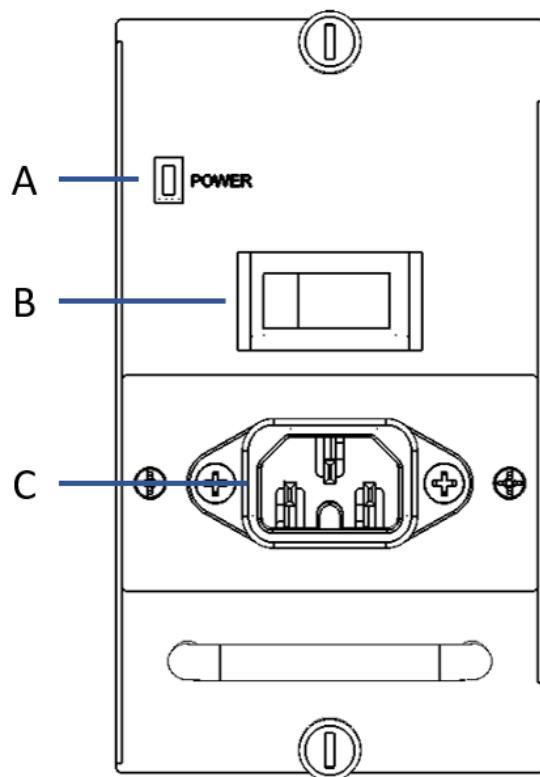


Figure 2. Front panel of CPC-PWR-AC-II

The interfaces on the front panel of the CPC-PWR-AC-II are described below:

- A. Power LED:** Indicates the status of power module.
- B. Power Switch:** Turns the power module on or off.
- C. Connector:** Connects to an AC 220~240V, 50/60Hz, 1.5A power source via a power cord.

1.2.2 Technical Specification

Power Input	220~240VAC, 50/60Hz, 1.5A
Operation Temperature	0°C ~70°C
Storage Temperature	-20°C ~85°C
Humidity	5% ~ 90% RH, non-condensing
Dimension	75 x 181 x 132 mm (W x D x H)
Weight	2.0 Kg
Certifications	CE/FCC Class A, CB(TUV), RoHS 2.0

1.3 The CPC-3002SFP-II-BT

The CPC-3002SFP-II-BT is a media converter module for the CPC-CHASSIS-08-II, offering PoE support and versatile network connectivity. The module includes one SFP slot for fiber-optic connections and one RJ-45 port for copper Ethernet. The CPC-3002SFP-II-BT is designed to be hot-swappable, allowing for easy installation and maintenance within the chassis.

1.3.1 Front Panel

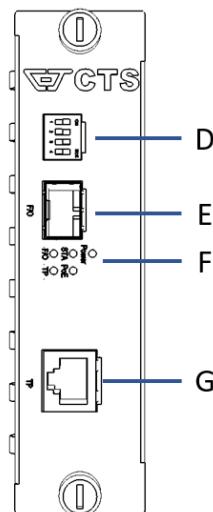


Figure 3. Front panel of CPC-3002SFP-II-BT

The interfaces on the front panel of the CPC-3002SFP-II-BT are described below:

D. DIP Switch: Indicates the status of power module. Refer to Section... for details.

E. 1 x 1000/100Base-X SFP slot

F. LEDs

- Includes Power, Status, PoE, F/O (Link/Act/Speed) and TP (Link/Act/Speed). For more details, please refer to [Section 1.4 LED Definitions](#).

G. 1 x 1000/100/10Base-T RJ-45 port

1.3.2 DIP Switch Setting

The default setting for Pin 1, 2, 3 is OFF and Pin 4 is ON.

Pin NO.	Function	OFF / Down	ON / Up
1	FX Speed Auto-Sensing	Disable	Enable
2	FX Force Mode	Disable	Enable
3	Link Alarm	Disable	Enable
4	PSE State	Disable	Enable

NOTE:

1. Pin 3 (Link Alarm) includes both Link Alarm and PAPO functions.
2. **Link Alarm:**
 - (1) When the fiber link goes down, the RJ-45 interface will be automatically shut down.
 - (2) When the fiber link is restored, the RJ-45 connection will automatically be reactivated.
 - (3) When the RJ-45 link goes down, the Fiber interface will be automatically shut down.
 - (4) When the RJ-45 link is restored, the Fiber connection will automatically be reactivated.
3. **PSE Auto Power Off (PAPO):**
 - (1) When the fiber link goes down, the PoE output on the RJ-45 interface will be automatically shut down. Once the fiber link is restored, the PoE output will be reactivated.
 - (2) This function operates only when both Link Alarm (Pin 3) and PSE State (Pin 4) are enabled.

1.3.3 Technical Specification

Standards		IEEE 802.3 10Base-T IEEE 802.3u 100Base-TX/FX IEEE 802.3ab 1000Base-T IEEE 802.3z 1000Base-X IEEE 802.3af Power over Ethernet IEEE 802.3at Power over Ethernet + IEEE 802.3bt Power over Ethernet ++
Interface		1 x 100/1000M SFP Slot 1 x 10/100/1000M RJ-45 with 802.3af/at/bt PoE injector
LED		Power, Status, TP Link/Act/Speed, F/O Link/Act/Speed, PoE
Power Input		54 VDC
Max. PoE Output		90W
Power Consumption		Full-load < 95W (324 BTU/hr), under BT 90W loading
Weight		270 g
Dimensions		34 x 94 x 132 mm (W x D x H)
Operation Temperature		0°C ~ 70°C
Storage Temperature		-20°C ~ 85°C
Humidity		5%~90% RH, Non-Condensing
Certification		CE/FCC Class A, CB(TUV), UKCA, RCM, RoHS 2.0
Media	TP	EIA/TIA-568 CAT 5e, 1000M
	Fiber	50/125 or 62.5/125 μ m multi-mode

2

Installation

To properly install the CPC-CHASSIS-08-II, please follow the procedures listed below. These procedures will be described in detail in the following sections.

- Installation Requirements
- Checking the Package Contents
- Installing the CPC-3002SFP-II-BT Media Converter Module
- Installing the CPC-CHASSIS-08-II
- Installing and Removing SFP Module
- Connecting the CPC-3002SFP-II-BT Media Converter Module to Network
- Installing the CPC-PWR-AC-II Power Module
- Power on the CPC-CHASSIS-08-II

2.1 Installation Requirements

Basic requirements for installation are as follows:

- Environmental conditions
 - Two power outlets (one for primary power and one for redundant power)
 - Proper ventilation
 - Proper isolation to electrical noise, radio, etc.
 - UTP cables should not run in the same duct with power and phone line cables
- Required CPC-3002SFP-II-BT slide-in media converter module.
- Required CPC-PWR-AC-II power module.
- Required SFP Transceivers and Fiber or UTP cables
- Redundant power supply
- Rack mounting tools

2.2 Checking the Package Contents

Unpack the package carefully and check the package contents. The package should contain the following items:

- CPC-CHASSIS-08-II package
 - CPC-CHASSIS-08-II media converter chassis x 1, (without media converter and power module)
 - Quick Guide x 1 (with QR code on it)
 - Rubber foot x 4
 - Screws x 20
- CPC-3002SFP-II-BT package
 - CPC-3002SFP-II-BT media converter module x 1
 - Quick Guide x 1 (with QR code on it)
- CPC-PWR-AC-II package
 - CPC-PWR-AC-II power module x 1
 - Power Cord x 1

If any of the above items is missing or damaged, please contact your local sales representative for support or replacement.

2.3 Installing CPC-3002SFP-II-BT




CAUTION

To prevent any damage or failure of the CPC-3002SFP-II-BT, please wear a grounding device and observe electrostatic discharge precautions before installing into the CPC-CHASSIS-08-II.

Follow the guidelines to install the media converter modules:

1. Plan the CPC-3002SFP-II-BT modules slot positions.
 - All slots are identical
 - CPC-3002SFP-II-BT media converter module can be installed into any slots.
2. Remove the protective plate from selected installation slot, if present.
3. Insert CPC-3002SFP-II-BT module carefully into the selected slot
 - Make sure that the CPC-3002SFP-II-BT module is firmly connected with the middle plane connector.
4. Fix the fastener screw.
5. Repeat steps 2 to 4 for all the CPC-3002SFP-II-BT modules.

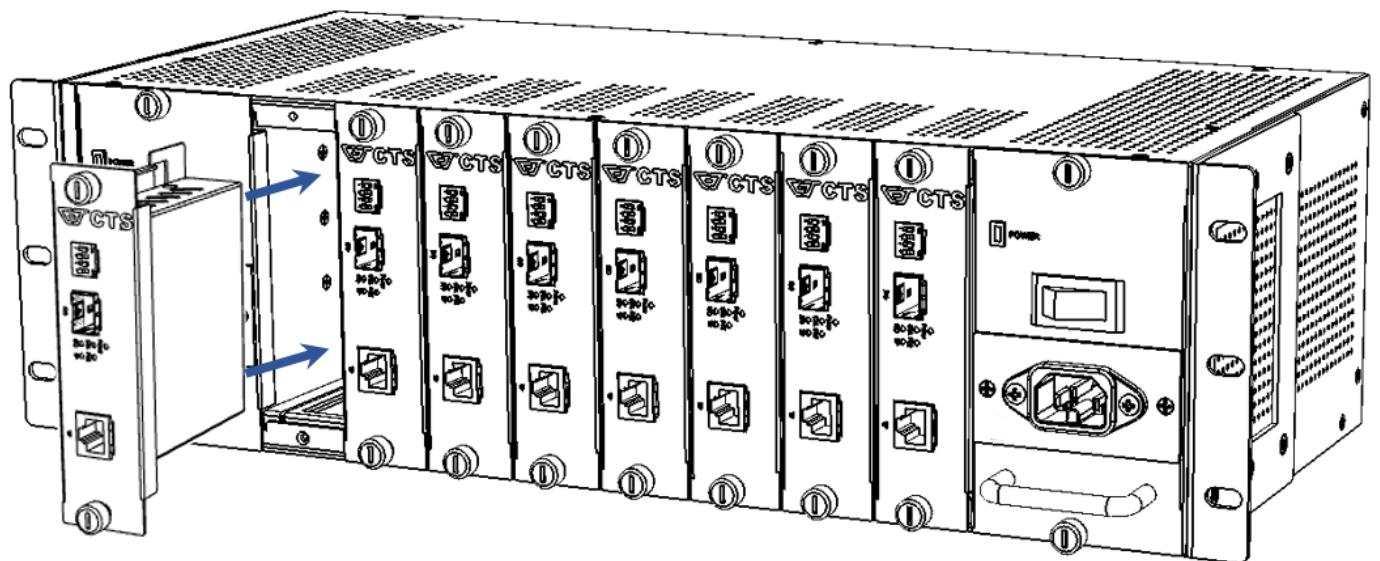

2.4 Installing the CPC-CHASSIS-08-II



CAUTION

To prevent any damage or failure of the CPC-CHASSIS-08-II and CPC-3002SFP-II-BT media converter modules, do not block the bottom of the CPC-CHASSIS-08-II.

2.4.1 Standard 19-inch Rack Installation




CAUTION

Please mount the CPC-CHASSIS-08-II firmly in rack otherwise the CPC-CHASSIS-08-II may fall and cause system damage and possible injury to personnel.

Follow the guidelines to mount the CPC-CHASSIS-08-II in rack:

1. Plan the CPC-CHASSIS-08-II rack positions.
2. Fix both mounting brackets into the selected mounting rail position.

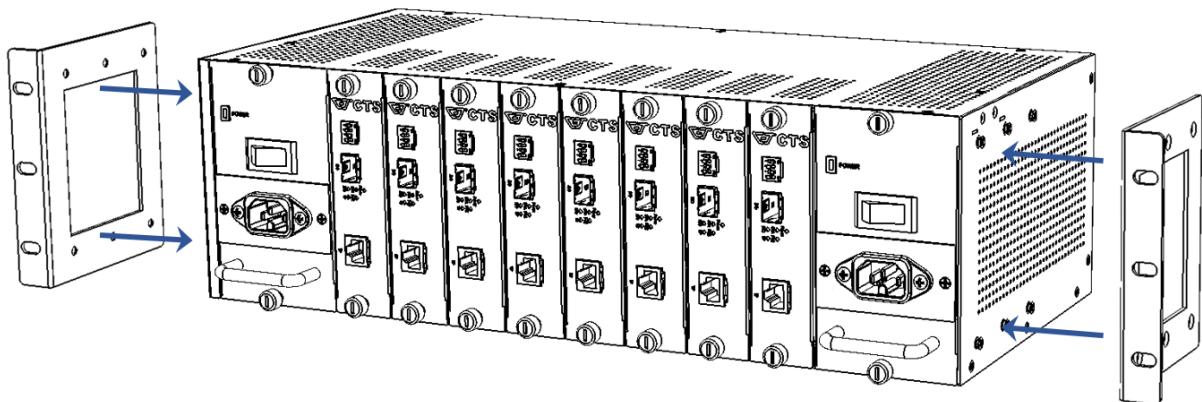

3. Align the CPC-CHASSIS-08-II with mounting bracket into the selected mounting rail position.
4. Fix the CPC-CHASSIS-08-II with mounting brackets into the selected mounting rail position carefully and firmly.

2.4.2 Desk Top Installation

1. Plan the CPC-CHASSIS-08-II desk top position.
2. Place the CPC-CHASSIS-08-II on a well ventilated, flat and firmly desk.

2.5 Installing and Removing SFP Modules

2.5.1 Installing SFP Modules in CPC-3002SFP-II-BT

To connect the fiber transceiver and LC cable, please refer to the following guidelines:

1. Position the SFP transceiver with the handle on top.
2. Locate the triangular marking in the slot and align it with the bottom of the transceiver.
3. Insert the SFP transceiver into the slot until it clicks into place.
4. Make sure the module is seated correctly before sliding the module into the slot. A click sounds when it is locked in place.

***Note:** If you are attaching fiber optic cables to the transceiver, continue with the following step. Otherwise, repeat the previous steps to install the remaining SFP transceivers in the device.*

1. Remove the protective plug from the SFP transceiver.

***Note:** Do not remove the dust plug from the transceiver if you are not installing the fiber optic cable at this time. The dust plug protects hardware from dust contamination.*

2. Insert the fiber cable into the transceiver. The connector snaps into place and locks.
3. Repeat the previous procedures to install any additional SFP transceivers in the CPC-3002SFP-II-BT. The fiber port is now set up.

2.5.2 Removing SFP Modules from CPC-3002SFP-II-BT

To disconnect an LC connector, please refer to the following guidelines:

1. Press down and hold the locking clips on the upper side of the optic cable.
2. Pull the optic cable out to release it from the transceiver.
3. Hold the handle on the transceiver and pull the transceiver out of the slot.

2.6 Connecting the CPC-3002SFP-II-BT media converter module to Network

1. Attach fiber cable from the Converter to the fiber network.
2. Attach a UTP cable from the 10/100/1000Base-T network to the RJ-45 port on the CPC-3002SFP-II-BT media converter module.

2.7 Installing the CPC-PWR-AC-II power module



CAUTION: SHOCK HAZARD



The CPC-CHASSIS-08-II supports hot-swappable power modules (CPC-PWR-AC-II) and may operate with two active power sources.

Removing a single power module does not interrupt system operation.


To avoid shock hazard:

- Do NOT touch internal connectors or exposed pins
- Do NOT connect power source to the CPC-PWR-AC-II before inserting it into the CPC-CHASSIS-08-II.
- Always ensure the power switch on the CPC-PWR-AC-II is turned OFF before inserting into CPC-CHASSIS-08-II

Inappropriate operation may cause system damage, possible injury, or casualty.

Follow the guidelines to install the CPC-PWR-AC-II modules:

1. Remove the protective plate from selected installation slot, if present.
2. Insert CPC-PWR-AC-II module carefully into the slot. **Ensure the power switch of the module being installed is turned off.**
 - Make sure that the CPC-PWR-AC-II module is firmly connected with the middle plane connector.

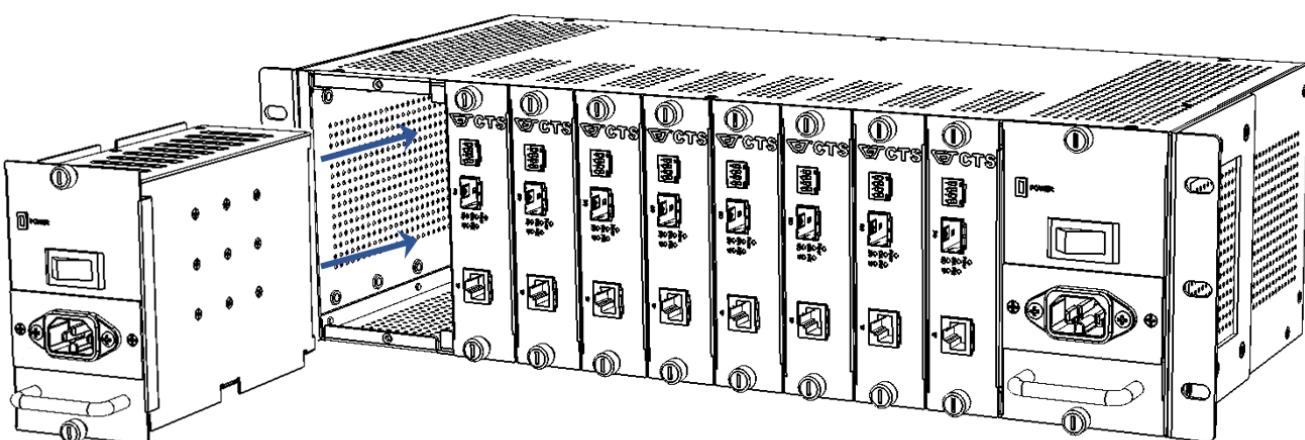

3. Fix the fastener screw.
4. Repeat steps 1 to 3 for another CPC-PWR-AC-II module.

NOTE:

1. The CPC-PWR-AC-II power module is hot-swappable and can be installed while another power module is operating. However, before inserting a power module, ensure the power switch of the module being inserted is turned off.

2.8 Power on the CPC-CHASSIS-08-II

Follow the guidelines to power on CPC-CHASSIS-08-II:

1. Check the power outlet.
2. Connect the power cord to the outlet
3. Turn on the power source and the power switch of the CPC-PWR-AC-II power module.
4. Verify the status of CPC-CHASSIS-08-II
5. Ensure the Power LED is on.

3

Operation

The CPC-CHASSIS-08-II is easy to operate; no special training is required. However, customers may perform local or remote status monitor through LED status.

3.1 LED Status

The Chassis is Plug & Play compliant. The real-time operational status can be monitored through a set of LED indicators located on the CPC-PWR-AC-II and CPC-3002SFP-II-BT.

3.1.1 LED of CPC-PWR-AC-II

LED	Color	Operation
Power	OFF	The power module is not available or works abnormally
	Green	The power module is available and operating normally.

3.1.2 LED of CPC-3002SFP-II-BT

LED	Color	Operation
Power	OFF	Device is powered down or works abnormally.
	Green	Lit when the power is operating normally.
Status	Green	Both TP and F/O links are up.
	Orange	TP or F/O link is down.
PoE	OFF	The port is not delivering power to powered device.
	Green	Lit when the port is providing PoE to remote powered device. Blinks when the PoE function is experiencing issues, such as: the input voltage being too low or too high, the PoE PD output being short-circuited, or the current exceeding power budget.
TP (Link/Act/Speed)	OFF	No link is established.
	Orange	Lit when 100Mbps or 10Mbps link is established.
	Green	Blinks when the port is receiving and transmitting data at the speed of 100Mbps or 10Mbps
	Green	Lit when 1000Mbps link is established. Blinks when the port is receiving and transmitting data at the speed of 1000Mbps.
F/O (Link/Act/Speed)	OFF	No link is established.
	Orange	Lit when 100Mbps link is established.
	Green	Blinks when the port is receiving and transmitting data at the speed of 100Mbps.
	Green	Lit when 1000Mbps link is established. Blinks when the port is receiving and transmitting data at the speed of 1000Mbps.

4

Maintenance

CPC-CHASSIS-08-II is easy to maintain, refer to the following sections when problem occur.

4.1 Fault Identification

Fault identification can help users quickly locate the problem and take proper actions to solve the problems.

4.1.1 Local Check

Check all CPC-CHASSIS-08 LED status and cable connections.

- When the whole system fails to function,
 1. Check Power LED status
 2. Check Power connection
 3. Reset CPC-CHASSIS-08-II power
- When certain network link fails to function,
 1. Locate related CPC-3002SFP-II-BT media converter modules
 2. Check the connection between CPC-3002SFP-II-BT and the middle plane.
 3. Check the Power LED of CPC-3002SFP-II-BT module.
 4. Check the TP and F/O LED of CPC-3002SFP-II-BT module.
 5. Check UTP connection between the CPC-3002SFP-II-BT modules and related device.
 6. Check Fiber connection between the CPC-3002SFP-II-BT modules and related device.
 7. Reset CPC-3002SFP-II-BT media converter module.

4.2 Hardware Replacement Procedures



CAUTION

The CPC-CHASSIS-08-II contains no user-serviceable parts.

Only hot-swappable module replacement is supported. Internal service or disassembly is prohibited.

DO NOT, UNDER ANY CIRCUMSTANCES, open and attempt to repair it. Failure to observe this warning could result in personal injury or death from electrical shock.

Failure to observe the above warning will immediately void any Warranty.

Replace CPC-3002SFP-II-BT Media Converter Modules

Procedure:

1. Remove the existing CPC-3002SFP-II-BT media converter module
2. Insert new CPC-3002SFP-II-BT media converter module carefully into the slot
 - ✓ Make sure that the CPC-3002SFP-II-BT media converter module is firmly connected with the middle plane connector.
3. Fix the fastener screw.

Replace CPC-PWR-AC-II Power Module

Procedure:

1. Remove the existing CPC-PWR-AC-II Power Module
 - ✓ Ensure that the power switch of the module being removed is turned off before removing.
2. Insert new CPC-PWR-AC-II Power Module carefully into the slot
 - ✓ Ensure that the power switch of the module being installed is turned off before installation.
 - ✓ Make sure that the CPC-PWR-AC-II Power Module is firmly connected with the middle plane connector.
3. Fix the fastener screw.



CONNECTION TECHNOLOGY SYSTEMS

18F-6, No.79, Sec.1, Xintai 5th Rd.,
XiZhi Dist., New Taipei City 221, Taiwan(R.O.C)

Tel: +886-2-2698-9661

Fax: +886-2-2698-9662

Dir.Line: +886-2-2698-9201

www.ctsystem.com