

Trademarks

CTS is a registered trademark of Connection Technology Systems Inc. Contents subject to revision without prior notice.

All other trademarks remain the property of their owners.

Copyright Statement

Copyright © Connection Technology Systems Inc.

This publication may not be reproduced as a whole or in part, in any way whatsoever unless prior consent has been obtained from Connection Technology Systems Inc.

FCC Warning

The SRC-3002SFP-DO and SRC-3002SFP-BT-DO Series converters have been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These standards are designed to provide reasonable protection against harmful interference when these devices are operated in a commercial environment. These devices generate, use, and can radiate radio frequency energy and may cause harmful interference to radio communications unless installed in accordance with this User's Guide. Operation of these devices in a residential area is likely to cause harmful interference which will make the user responsible for the appropriate remedial action at his / her own expense.

CE Mark Warning

These are Class A products. In a domestic environment these products may cause radio interference in which case the user will need to consider adequate preventative methods.

1. Overview

Thank you for purchasing CTS SRC-3002SFP-DO series Media Converter that include SRC-3002SFP-DO and SRC-3002SFP-BT-DO. In this user's guide, "Media Converter" will be used as an alternative name for SRC-3002SFP-DO Series.

Major Features:

- TP Auto-Negotiation
- MDI/MDIX Auto-Crossover
- 9K bytes Jumbo Frame
- Store and Forward switching mechanism
- 2K MAC address
- Link Alarm
- Alarm (Digital Output)
- Up to 90 watts PoE output (SRC-3002SFP-BT-DO only)
- PSE Auto Power Off (SRC-3002SFP-BT-DO only)


2. Checklist


The items listed below should be included in the package:

- Media Converter
- User's Guide
- 1 x Din-rail bracket (already locked on the media converter)
- 1 x Wall mounting kit

Please contact your sales representative for assistance immediately if any item is missing or damaged.

3. Installation

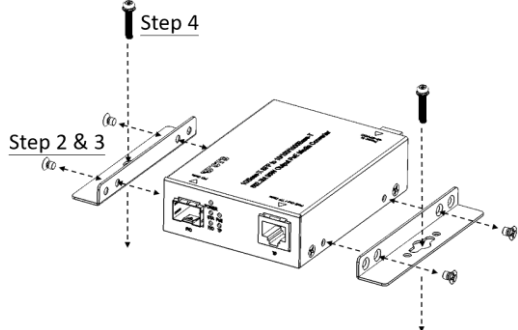①	Set the DIP switch according to section four.
②	Insert the SFP transceiver into the SFP slot.
③	<p>The picture guide below is for flat installation.</p> <p>Follow the picture guide to install the media converter flatly by wall mounting or Din-rail.</p> <p>*The following images use the SRC-3002SFP-BT as an example.</p> <p>(1) Wall mounting</p> <ul style="list-style-type: none">-Step 1: Remove Din-rail bracket-Step 2: Remove 4 screws from housing-Step 3: Re-install 4 screws with wall mounting kit-Step 4: Mount the media converter on the wall 

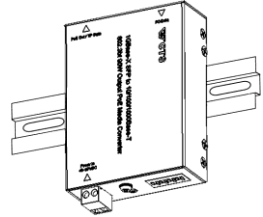③	<p>(2) Din-rail</p>  <p>NOTE: Besides the flat installation, we also provide accessories for slim installation, please contact our sales if needed.</p>
④	Attach fiber cable from the media converter to the fiber network. The fiber connector must be matched – <u>transmit socket to receive socket</u> .
⑤	Attach a UTP cable from the 10/100/1000BASE-T network to the RJ-45 port on the media converter.
⑥	<p>Connect the power source to the media converter and check that the Power LED lights up. The TP Link/Act/Speed and F/O Link/Act/Speed LEDs will light up when all the cables are properly connected.</p> <p>(1) Note: The wire gauge for the terminal block should be 18 AWG or above.</p> <p>(2) The DC plug of the power adapter for SRC-3002SFP-DO should be OD: 5.5 mm, ID: 2.1 mm, Length: 9.5 mm, and support a minimum output of 5W.</p>

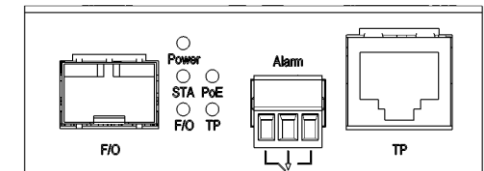


Figure 1. Front Panel of Media converter

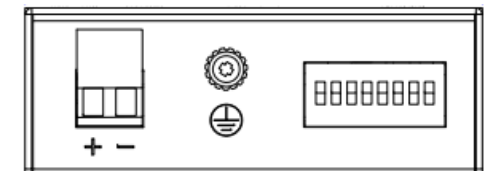


Figure 2. Rear Panel of Media converter

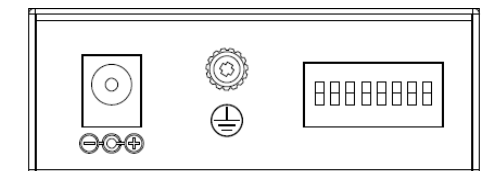


Figure 3. Rear Panel of Media Converter (DC jack version)

4. DIP SWITCH Setting

The default setting for all PIN is ON.

Pin NO.	Function	OFF / Down	ON / Up
1	TP Auto-Negotiation	Manual	Auto
2	TP Speed	100Mbps	1000Mbps
3	Fiber Mode	Force	Auto
4	Fiber Speed	100Mbps	1000Mbps
5	Link Alarm	Enabled	Disabled
6	F/O Fault Alarm	Enabled	Disabled
7	TP Fault Alarm	Enabled	Disabled
8*	PSE Auto Power Off (PAPO)*	Enabled	Disabled

NOTE:

- 1 Please power off the device first when you change DIP switch.
- 2 Pin 2 can only be activated when Pin 1 is in the OFF position.
- 3 Pin 4 can only be activated when Pin 3 is in the OFF position.
- 4 If Pin 6 or 7 is set to off (enabled), an alarm will be triggered when the corresponding port has no connection.
- 5 *Pin 8 is dedicated exclusively to SRC-3002SFP-BT-DO.
- 6 Pin 8 can only be activated when Pin 5 is in the OFF position.
The PAPO function only works as Link Alarm function is enabled.

5. LED Description

LED	Color	Function
Power	Green	Power is available.
TP Link/Act /Speed	Off	No link is established.
	Green	10 Mbps or 100 Mbps link is established.
	Orange	1000 Mbps link is established.
	Blinking	Data packet is transmitting.
F/O Link/Act /Speed	Off	No link is established.
	Green	100 Mbps link is established.
	Orange	1000 Mbps link is established.
	Blinking	Data packet is transmitting.
PoE*	Off	The port is not delivering PoE.
	Green	The port is delivering PoE to the remote PD.
	Blinking	The PoE function encounters issues, such as: the input voltage is too low or too high; the PoE PD output is short-circuited, or the current is exceeding 2A.
Status	Green	Both TP and F/O link are established.
	Orange	TP or F/O link is not established.

* PoE LED is dedicated exclusively to SRC-3002SFP-BT-DO.

6. Technical Specifications


Standards	IEEE 802.3, 802.3u, 802.3ab, 802.3z, 802.3af*, 802.3at*, 802.3bt*
Interface	SRC-3002SFP-DO: 1 x 100/1000M SFP Slot 1 x 10/100/1000M RJ-45 connector SRC-3002SFP-BT-DO: 1 x 100/1000M SFP Slot 1 x 10/100/1000M RJ-45 connector with 802.3af/at/bt PoE injector
LED	Power, Status, TP Link/Act/Speed, F/O Link/Act/Speed, PoE*
Power Input	SRC-3002SFP-DO: DC 12-57V SRC-3002SFP-BT-DO: DC 48-57V
Max. Power Consumption	SRC-3002SFP-DO: 2.45 watts (8.36BTU/hr) SRC-3002SFP-BT-DO: 102 watts (348BTU/hr)
Weight	SRC-3002SFP-DO: 190 g SRC-3002SFP-BT-DO: 220 g
Dimensions	71mm(W)x94mm(D)x26mm(H)
Temperature	Operating: SRC-3002SFP-DO: -40°~75°C SRC-3002SFP-BT-DO: -20°~60°C Storage: -40°~85°C
Humidity	5%~95% RH, Non-Condensing
Certification	FCC Class A, CE
Media	TP: EIA/TIA-568 CAT 5e, 1000M Fiber: 50/125 or 62.5/125μm multi-mode 9/125 or 10/125μm single-mode

* SRC-3002SFP-BT-DO only

NOTE: Specifications may change without prior notice. Please contact us for further reports and updates.

7. Alarm Relay Configuration

The 3-pin terminal block (alarm/digital output) located on the front panel is used to connect alarm devices.

1	Set the DIP switch PIN 6 and 7 according to section four.	
2	Please refer to the image on the right and the instructions below to connect the wires to the terminal block based on the required normal status for your connected device.	
	- Normally Closed: Connect to the left and the middle holes. - Normally Open: Connect to the right and the middle holes.	

Contact Information

Connection Technology Systems INC (CTS)
18F-6, No.79, Sec.1, Xintai 5th Rd., Xizhi Dist.,
New Taipei City 221, TAIWAN, R.O.C.
TEL: +886 2 26989661 FAX: +886 2 26989662
E-Mail: info@ctsystem.com



SRC-3002SFP-DO

100/1000Base-X SFP to
10/100/1000Base-T RJ-45
Rugged Media Converter

SRC-3002SFP-BT-DO

100/1000Base-X SFP to
10/100/1000Base-T RJ-45 with
IEEE 802.3af/at/bt PoE Injector
Rugged Media Converter

User's Guide

Version 1.0