



MCT-3612 Series

1 x 10/100/1000Base-T RJ-45 to
1 x 1000Base-X BTFC/W2X or
100/1000Base-X BTFC/W2X/SFP
Compact Managed Media Converter

Description

Connection Technology Systems (CTS) MCT-3612 series media converter are the Gigabit Ethernet 10/100/1000Base-T to 1000Base-X or 100/1000Base-X media converter. MCT-3612 series media converter allows user to connect Ethernet twisted-pair RJ-45 cable into various fiber media including Multi-mode, Single-mode, Bi-directional WDM, or a SFP slot for pluggable fiber transceiver, extending transmission distance for the deployment to the household, apartment or campus.

MCT-3612 series media converter is fully compliant with IEEE 802.3, 802.3u, 802.3ab & 802.3z standards. Besides, it is equipped with some switching features including flow control and store and forward mechanism.

The installation and operation are quite simple and straightforward. The operation status can be monitored through a set of diagnostic LED indicators on the front panel. It is especially designed for network operators, metro Ethernet providers, enterprises, SMB, who have the need of implementing fiber optical Ethernet networks over long distance, for FTTX solutions, and are looking for an effortless and reliable 1000Mbps media converter.

Key Features

■ 9K Bytes Jumbo Frame Size

Support Jumbo Frame Size 9K Bytes to ease the Network Traffic Loading and Facilitate IPTV Services.

■ Local Management for Port Status and Configuration

Both Local Module Control (Auto, Speed and Duplex) and Local Module Monitor (Link, Speed and Duplex) are available.

■ Fully Compatible with MCT-RACK-12-MGM and MCT-RACK-18-MGM

Budget limited Solution for MCT-RACK-12-MGM and MCT-RACK-18-MGM to mix Installation with CTS's non-Management Media Converter.

■ Link Alarm

When UTP or Fiber Port is Down during Operation, the other Port will be automatically turned off to alert the User.

■ Dual Rate with Auto-Sensing Function *

Dual Rate Fiber Transceiver with Auto-Sensing Function can automatically adjust the Transmission Speed to save the Cost when upgrading the Device from 100Mbps to 1000Mbps.

■ Targeted Applications

- Managed media converter which required monitoring point-to-point connection for the deployment of FTTX applications

*Only supported on -DR model.

Specification

■ Interface

RJ-45 Port

- 1 x 10/100/1000Base-T RJ-45

Fiber Port

- 1 x 1000Base-X BTFX/W2X (MCT-3612 only)
- 1 x 100/1000Base-X BTFX/W2X/SFP (MCT-3612-DR only)

Standards

- IEEE 802.3 10Base-T
- IEEE 802.3u 100Base-TX
- IEEE 802.3u 100Base-FX *
- IEEE 802.3ab 1000Base-T
- IEEE 802.3z 1000Base-X

■ H/W Specification

- MAC Address Table: 2K
- Non-blocking Switching Fabric: 4Gbps
- Throughput @ 64Bytes: 2.97Mpps
- Jumbo Frame: 9K Bytes
- Packet Buffer: 128K Bytes
- Store and Forward Switching Mechanism
- Auto-Cross over for MDI/MDI-X in TP port
- Auto-Negotiation in TP Port
- Full/Half Duplex Mode Operation

■ Forward/Filter Rate

- 10M: 14,880/14880pps
- 100M: 148,800/148,800pps
- 1000M: 1,488,000/1,488,000pps

■ LED

Power, Status, FDX,
TP Link/Act/Speed, F/O Link/Act/Speed

■ DIP Switch

- TP Auto-Negotiation Enable/Disable
- TP Speed 10/100Mbps
- TP Speed 1000Mbps
- Fiber Speed Manual/Auto-Sensing
- Fiber Speed 100/1000Mbps
- F/O mode Force/Auto
- Link Alarm Enable/Disable
- Configured via DIP switch/Software

■ Installation Method

- Wall-mount (optional)
- DIN-rail (optional)
- Magnetic-mount kit (optional)

■ In-Rack Management

Module Firmware Upgrade

Module Reset, Power OFF/ON

Module Monitor

- Port Status/Traffic Counter
- SFP SFF-8472 DDMI Monitor
- Temp/Voltage/TX Bias/TX Power/RX Power

Module Configuration

- Description
- Link Alarm
- Port State/Type/Speed
- Port-Based Rate Limit (Ingress/Egress)
- Broadcast Storm Control
- IEEE 802.1q VLAN
- Q-in-Q Double tag with Configurable Ether Type

■ Power Requirement

- Power Input (Main body): 5 VDC
- Power Adaptor (Including in package):
Input : 100~240 VAC, 50~60 Hz
Output : 5 VDC
- Max. Power Consumption: 3W (10.23 BTU/h)

■ Environmental Condition

- Operation: 0°C~50°C
- Storage: -20°C~60°C
- Humidity: 5%~90% RH, Non-Condensing

■ Dimension & Weight

- Size: 51 x 74 x 20mm (W x D x H)
- Weight: 0.1kg
- Housing: Iron

■ Standards and Certifications

CE/FCC Class A


- Safety: IEC 62368-1
- EMC: EN 55032 / EN 55035
- ESD
Air Discharge: +/-8kV
Contact Discharge: +/-4kV
- EFT
AC input: +/-1kV
Signal (RJ-45): +/-0.5kV
- Surge Protection
AC input: +/-1kV
Signal (RJ-45): +/-1kV

UKCA/RCM

RoHS 2.0

*Only supported on -DR model.

Application Diagram

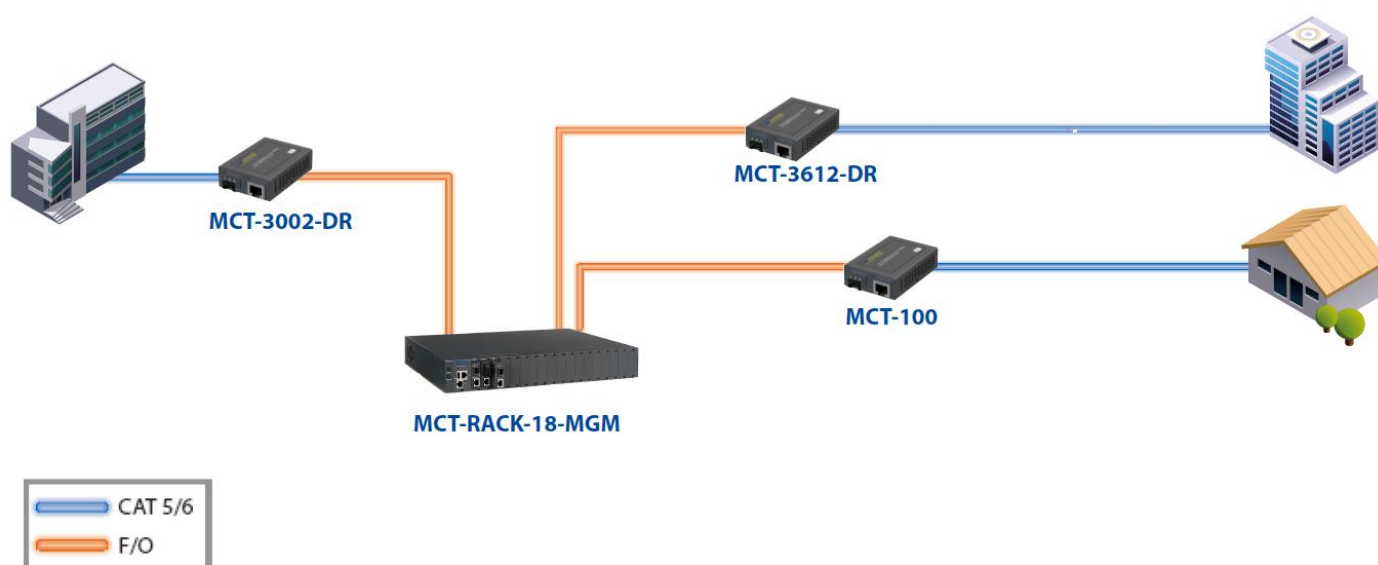

Order Information

MCT-3612

Model	Fiber Port						TP Port	
	Speed (Mbps)	Type	Connector	Distance	Wavelength	Port	Speed (Mbps)	Port
MCT-3612BTFC	1000	MM	SC	550M	850nm	1	10/100/1000	1
MCT-3612BTFC(SM-10/20/30)	1000	SM	SC	10/20/30KM	1310nm	1	10/100/1000	1
MCT-3612W2A(SM-10/20/40)	1000	WDM	SC	10/20/40KM	TX: 1310nm RX: 1550nm	1	10/100/1000	1
MCT-3612W2B(SM-10/20/40)	1000	WDM	SC	10/20/40KM	TX: 1550nm RX: 1310nm	1	10/100/1000	1

MCT-3612-DR

Model	Fiber Port						TP Port	
	Speed (Mbps)	Type	Connector	Distance	Wavelength	Port	Speed (Mbps)	Port
MCT-3612BTFC(SM-10)-DR	100/1000	SM	SC	10KM	1310nm	1	10/100/1000	1
MCT-3612W2A(SM-10)-DR	100/1000	WDM	SC	10KM	TX: 1310nm RX: 1550nm	1	10/100/1000	1
MCT-3612W2B(SM-10)-DR	100/1000	WDM	SC	10KM	TX: 1550nm RX: 1310nm	1	10/100/1000	1
MCT-3612SFP-DR	100/1000	SFP	-	-	-	1	10/100/1000	1

Accessory

SFP-31

Model	Specification					
	Speed	Type	Connector	Distance	Wavelength	Operating Temperature
SFP-31FC-DR	100/1000Mbps	MM	LC	550M/2KM	1310nm	0°C~70°C
SFP-31FC(SM-10)-DR	100/1000Mbps	SM	LC	10KM	1310nm	0°C~70°C
SFP-31W2A(SM-10/20)-DR	100/1000Mbps	WDM	LC	10/20KM	TX: 1310/1310nm RX: 1550/1550nm	0°C~70°C
SFP-31W2B(SM-10/20)-DR	100/1000Mbps	WDM	LC	10/20KM	TX: 1550/1550nm RX: 1310/1310nm	0°C~70°C
SFP-31FC	1000Mbps	MM	LC	550M	850nm	0°C~70°C
SFP-31FC(SM-10/20/40)	1000Mbps	SM	LC	10/20/40KM	1310/1310/1310nm	0°C~70°C
SFP-31W2A(SM-10/20/40)	1000Mbps	WDM	LC	10/20/40KM	TX: 1310/1310/1310nm RX: 1550/1550/1550nm	0°C~70°C
SFP-31W2B(SM-10/20/40)	1000Mbps	WDM	LC	10/20/40KM	TX: 1550/1550/1550nm RX: 1310/1310/1310nm	0°C~70°C

Copper SFP

Model	Specification			
	Speed	Connector	Distance	Operating Temperature
SFP-30TP	1000Mbps	RJ-45	100M	0°C~70°C

Connection Technology Systems Inc. (HQ)
 Tel.: +886-2-2698-9661
 E-mail: cts_esales@ctsystem.com
 info@ctsystem.com
 Sales Direct Line: +886-2-26989201

Connection Technology Systems Japan
 Tel: +81-6-6450-8890
 E-mail: cts_japan@ctsystem.com

Connection Technology Systems NE AB
 Tel: +46-31-221980
 E-mail: info@ctsystem.se

Connection Technology USA Inc.
 Tel: +1-510-509-0304
 Sales Direct Line: +1-510-509-0305
 E-mail: cts_us@ctsystem.com

Connection Technology Systems CE GmbH
 Tel: +43-1-235 05 66-0
 E-mail: cts_ce@ctsystem.com

Connection Technology Systems India Private Limited
 E-mail: kirti_simha@ctsystem.com

