

IAC-3014 Industrial Media Converter



Features

- Provide 2 Gigabit RJ-45 Copper Ports & 2 SFP Ports 100Base-FX or 1000Base-X
- Support 9K Jumbo Frames
- Dual Wide-Range Power Input (12~48VDC)
- Support 3 Operating Modes - Switch mode, Fiber Backup mode and Dual Media Converter mode
- Relay Output for Fault Alarm Notification (Power, Ports)
- Aluminum Housing
- Operating Temperature -40°C~75°C

2 Ports 100/1000Mbps SFP Dual Rate and 2 Ports 10/100/1000Base-T Industrial Multi-Functional Media Converter

Description



Connection Technology Systems (CTS) IAC-3014 media converter is a Gigabit Ethernet 10/100/1000Base-T to 100/1000Base-X media converter. The IAC-3014 media converter converts traditional twisted-pair RJ-45 cable into various fiber media including multi-mode, single-mode with SC connectors or bi-directional WDM to fulfill different requirements depending on the deployment.

The IAC-3014 media converter is designed for deployment at industrial sites. With DIN-Rail mounting, you can easily mount the industrial media converter at your sites. The media converter supports two DC power inputs to provide redundancy and prevent any possible power loss and Relay output to serve as an alarm.

The IAC-3014 media converter supports extended working temperature from -40°C to 75°C to withstand against harsh environment for a better performance. It is designed for surveillance network system integrators, who have the needs of implementing fiber optical Ethernet networks over long distance for wide-area surveillance solutions with the demand of wide operating temperature, and are looking for an effortless and robust Gigabit media converter.


The IAC-3014 media converter supports three different operating modes and provides system integrators the flexibility to design their networks under different applications with the same product, thus lowering the complexity of their operation and the inventory pressure.

Application Diagram

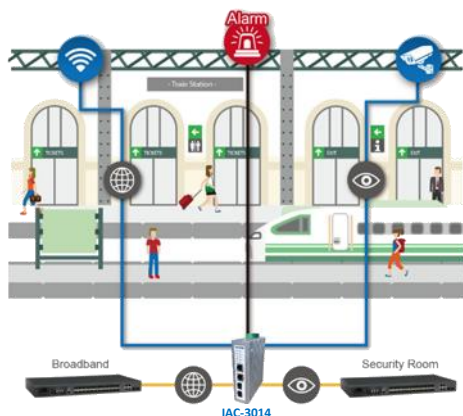

Scenario 1: Bridges/Tunnels

A long-distant area in need of a surveillance system can sometimes cause extra costs during the deployment. CTS' brand-new industrial converter, IAC-3014, supports **switch mode**, which enables the converters to build a chain network easily and solves the problem.

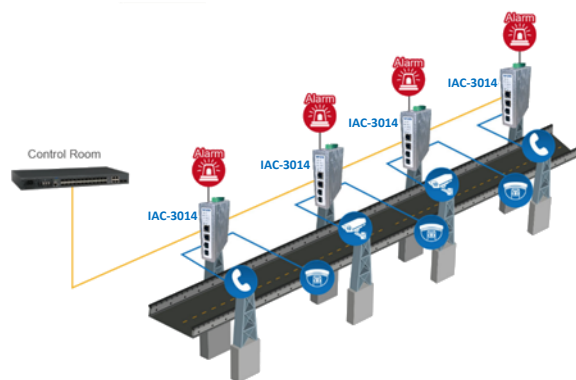


Scenario 2: Public Venues

With the uprising trend of mobile devices, more and more public venues provide free Wi-Fi broadband to satisfy their customers. At the same time, the security of surveillance systems cannot be compromised. CTS IAC-3014 supports **dual media converter mode**, which separates the traffic for different purposes (e.g. Public Wi-Fi and Surveillance).

Scenario 3: Highly Secured Places

At highly secured checkpoints, malfunction of the surveillance systems might cause severe damage beyond imagination. CTS IAC-3014 supports **fiber backup mode**, which enables the system to work smoothly if a fiber cable link is down.

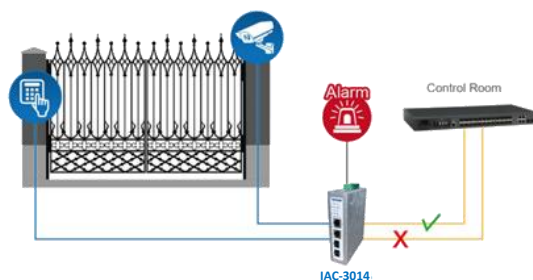

Specification

Interface

- TP Port: 2 x 10/100/1000Base-T RJ-45
- F/O Port: 2 x 100/1000Base-X SFP

Standards

- IEEE 802.3 10Base-T
- IEEE 802.3u 100Base-TX/FX
- IEEE 802.3ab 1000Base-T
- IEEE 802.3z 1000Base-X

H/W Specification

- Store and Forward Switching Mechanism
- Auto-negotiation in Copper and Fiber Port
- MDI/MDIX Auto-crossover Supported
- Support Fault Alarm Notification (Power, Ports)
- Support Auto & Force Mode Configuration
- Support Full/Half Duplex Mode
- MAC Address Table : 2K
- Memory Buffer: 128K Bytes
- Relay Output
- Surge Protection: 6KV (K.21)

LED

P1, P2, ALM, Mode, TP1, TP2, SFP1, SFP2

Ethernet Features

Jumbo Frames: 9K Bytes

Other Features

- DIP Switch Configuration
- Installation Type: DIN Rail Mounting

Environmental Condition

- Operating Temperature: -40°C ~ 75°C
- Storage Temperature: -40°C ~ 85°C
- Humidity: 5% ~ 90%, non-condensing

Power Requirement

- DC Input:
 - Terminal Block x 1 with two power inputs
 - Input Voltage: 12 ~ 48VDC
 - Power Consumption: 4.8W (Max.)


Dimension & Weight

- Size: 36 x 110 x 135 mm (W x D x H)
- Weight: 0.58Kg
- Housing: Aluminum, IP30

EMC/Safety

- FCC Class A, CE
- ITU-T K.21
- Shock: IEC 60068-2-27
- Freefall: IEC 60068-2-32
- Vibration: IEC 60068-2-6

Dimension

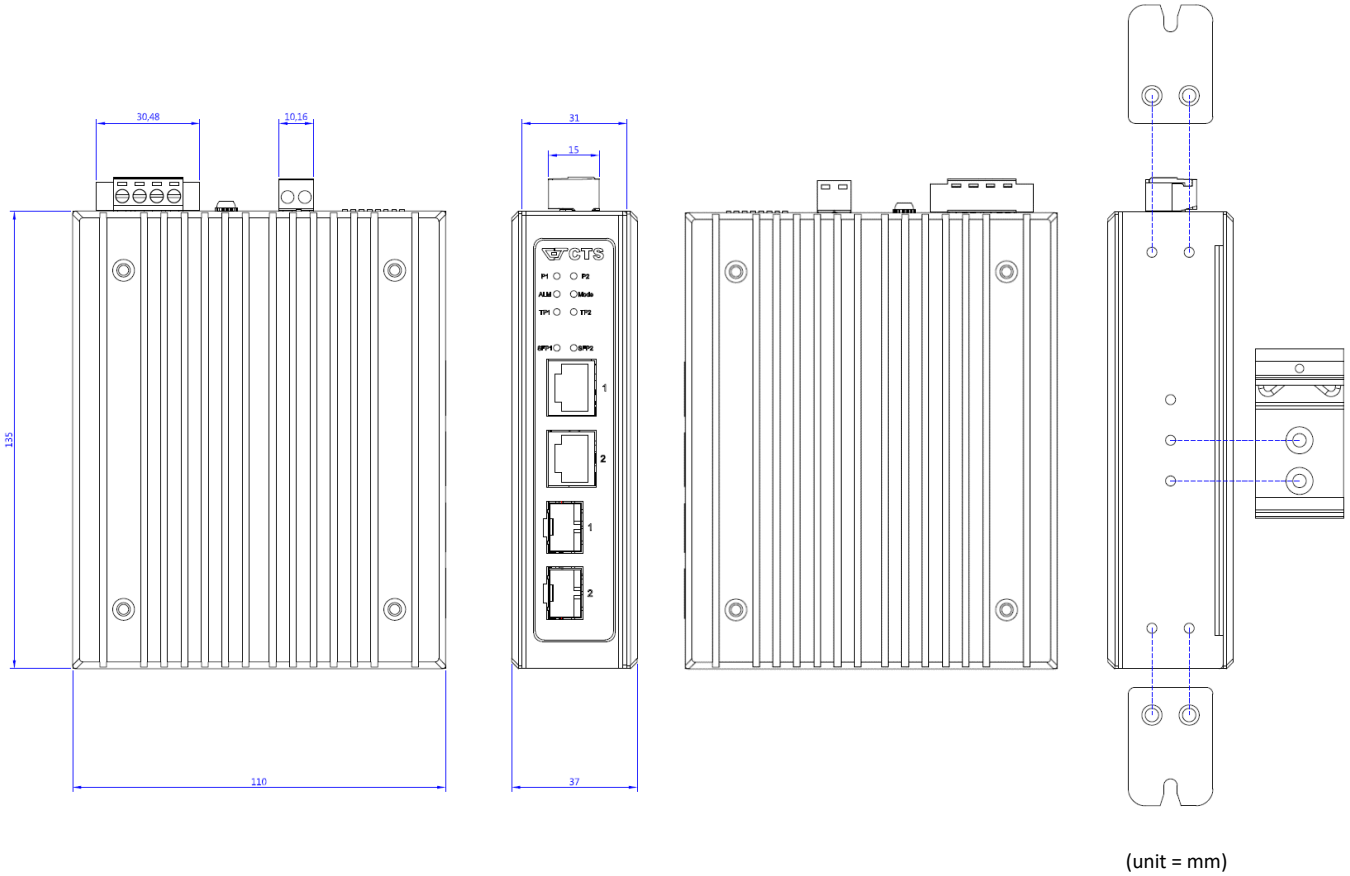

Order Information

IAC-3014

Model	Fiber Ports					TP Ports		Support Power Source
	Speed	Type	Connector	Distance	Ports	Speed	Ports	
IAC-3014	100/1000 Mbps	SFP	-	-	2	10/100/1000 Mbps	2	Terminal Block x 1 with two power inputs

Accessory

Power Supply

Model	Description	Remarks
SDR-480-48	48V/480W Din-Rail Power Supply	Working Temperature: -25°C ~ 70°C
SDR-240-48	48V/240W Din-Rail Power Supply	Working Temperature: -25°C ~ 70°C
SDR-120-48	48V/120W Din-Rail Power Supply	Working Temperature: -25°C ~ 70°C
SDR-75-48	48V/75W Din-Rail Power Supply	Working Temperature: -25°C ~ 70°C
NDR-480-48	48V/480W Din-Rail Power Supply	Working Temperature: -20°C ~ 70°C
NDR-240-48	48V/240W Din-Rail Power Supply	Working Temperature: -20°C ~ 70°C
NDR-120-48	48V/120W Din-Rail Power Supply	Working Temperature: -20°C ~ 70°C
NDR-75-48	48V/75W Din-Rail Power Supply	Working Temperature: -20°C ~ 70°C
MDR-60-48	48V/60W Din-Rail Power Supply	Working Temperature: -20°C ~ 70°C
MDR-20-12	12V/20W Din-Rail Power Supply	Working Temperature: -20°C ~ 70°C

SFP-31-D

Model	Fiber Port					Operating Temperature
	Speed	Type	Connector	Distance	Wavelength	
SFP-31FC-D	1000Mbps	MM	LC	550M	850nm	-40°C ~ 85°C
SFP-31FC-(MM-02)-D	1000Mbps	MM	LC	2KM	1310nm	-40°C ~ 85°C
SFP-31FC(SM-10/20)-D	1000Mbps	SM	LC	10/20KM	1310/1310nm	-40°C ~ 85°C
SFP-31W2A(SM-10/20)-D	1000Mbps	WDM	LC	10/20KM	TX: 1310/1310nm	-40°C ~ 85°C
					RX: 1550/1550nm	
SFP-31W2B(SM-10/20)-D	1000Mbps	WDM	LC	10/20KM	TX: 1550/1550nm	-40°C ~ 85°C
					RX: 1310/1310nm	